



2013 ~ 2014 / Product Catalogue

Introduction




For 41 years, SunRace have been producing quality bicycle transmissions and drivetrain components. More recently, we have added our top of the line products under the Driven brand.

This catalogue illustrates the complete range of SunRace and Driven cycle components including the latest innovations in Shifters, Front & Rear Derailleurs, Cranksets, Cassettes & Freewheels, Chains, Hubs, Bottom Bracket axles and Brakes.



2013 New Products

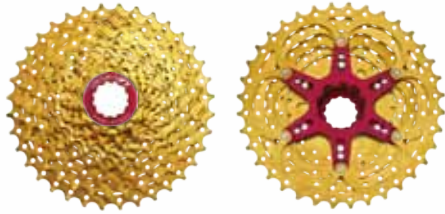

CSMZ

Featuring a new brilliantly shiny Titanium-Nitride finish. New red anodized aluminum spider, spacers, and lockring. Five largest sprockets mounted to two separate spiders.



CSMX

New red anodized aluminum spiders, spacers, and lockring with champagne or black chrome sprocket finish. Five largest sprockets mounted on two separate spiders.



CSM99

New 9-speed cassettes featuring a large 36T sprocket. With the three largest cogs mounted on an aluminum spider and an aluminum lockring, they are light and rigid. Ideal for 29ers.



CSM91

New 9-speed 11-34T and 11-32T cassette in nickel finish with aluminum lockrings.



CSM96 / CSM66

New nickel plated sprocket finish with black lockrings. Available in both 9 and 8 speed versions in various MTB ratio options.



CSM40

New 7-speed 11-34T and 11-28T cassettes with zinc or phosphate black finish.



RDM97

New black and silver combo finish with new graphic styling.



RDM91

New entry level 9-speed derailleur featuring an aluminum bracket body, steel outer and inner links, composite plate body, and steel cage.



RDM57

New 8-speed derailleur featuring composite bracket and plate body, steel outer and inner links, steel cage, and 11T pulleys.



RDM41

New 7-speed derailleur featuring composite bracket and plate body, steel outer and inner links, steel cage, with 11T guide pulley & 13T tension pulley.

2013 New Products



FDM97 / FDM96
FDM67 / FDM66
FDM56 / FDM34

Revised with new multi-clamp inserts which offer either a 34.9mm, 31.8mm, or 28.6mm seat tube size all with one clamp. This reduces the need to stock multiple sizes of front derailleurs.



TSM27

New entry level index twist shifters with smaller moving grips.



CSRZ1

New 11-Speed 11-28T and 11-32T cassettes in titanium-nitride, black chrome, or champagne sprocket finish. New red anodized aluminum spider, spacers, and lockring. Three largest sprockets mounted on an aluminum spider.



CSRX1



CSRX

New red anodized aluminum spider, spacers, and lockring. Featuring champagne or black chrome sprocket finish and now available in 12-28T or 11-32T ratios.



CSRS

New 12-28T and 11-32T ratios now added into our range. New black lockrings.



CSR91 / CSR86

New nickel plated sprocket finish with black lockrings. Available in both 9 and 8 speed versions in various road ratio options.



RDR37

New entry level 7 & 6 speed road derailleur.



Top of the line 10 speed MTB components.




P.08

Driven MZ, top of the line 9 x 3 speed MTB components.



P.10

Driven MX, ultra high performance 9 x 3 speed MTB components.

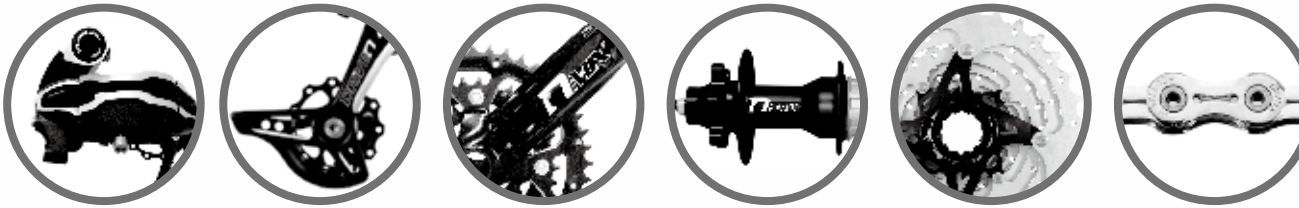

P.11

Sun Race performance 27 speed MTB group.



P.12

Sun Race entry 27 speed MTB group.



P.13

CONTENTS

Sun Race performance 24 speed MTB group.

M60
SUNRACE



P.14

Sun Race entry 24 speed MTB group.


M50
SUNRACE



P.15

Sun Race MegaDrive 21 speed MTB group.

M40
SUNRACE

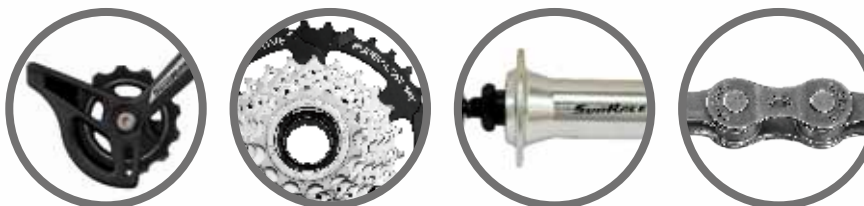

P.16

Sun Race 21/18 speed MTB group.

M30
SUNRACE



P.17

Sun Race entry 21/18 speed MTB group.

M20
SUNRACE





P.18

Sun Race friction 21/18/15 speed MTB group.



P.20

E-Bike freewheels in 10, 9, and 8 speed.



P.21

Top of the line 11 x 2 speed road components.



P.22

Driven RZ, top of the line 10 x 2 speed road group.



P.22

Driven RX, ultra high performance 10 x 2 speed road group



P.24


CONTENTS

Sun Race performance 10x2 speed Road group.




P.26

Sun Race performance 9x2 or 9x3 speed Road group.

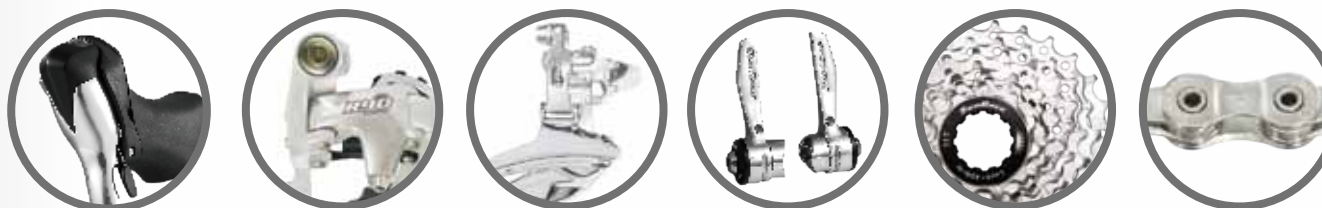

P.28

Sun Race 8x2 or 8x3 speed Road group.

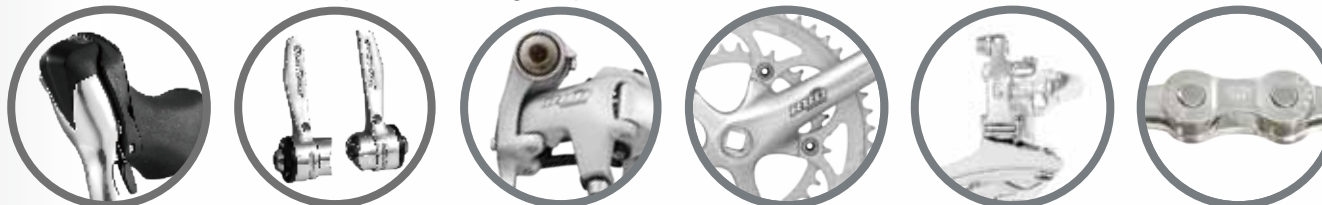


P.30

Sun Race 7x2 or 6x2 speed Road group.



P.32

Sun Race entry friction Road group.

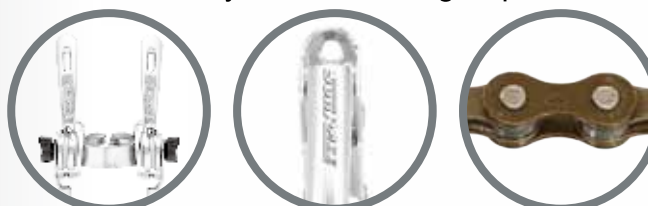

P.33

Bottom Brackets	34
Outer Casings	36
Chains	38
Service Parts	41
After Market Packaging	46

MTB

Trigger Shifters	51
Twist Shifters	52
Thumb Shifters	54
Front Cranksets	55
Front Derailleurs	57
Rear Derailleurs	58
Cassettes	61
Freewheels [E-Bike]	64
Freewheels	65
Hubs	66

ROAD

STR Shifters	68
Thumb Shifters	69
Front Cranksets	70
Front Derailleurs	72
Rear Derailleurs	73
Cassettes	75
Freewheels	78
Brake Levers	79
Brake Calipers	79

Bottom Brackets	81
Chains	85
Outer Casings	88
Disc Pads	89

NMZ 10-Speed

NMX 10-Speed

DRIVEN
10x3 & 10x2 Speed



T[Titanium-Nitride]


CSMZ TAW 11-36T
[10-Speed]
[2-Piece Alloy Spider]
[Alloy Spacers]
[6061 Lockring]
[341 g]



CNR1Z (T)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Hollow Plates]
T[Titanium-Nitride]
244g/110L



O[Black Chrome]

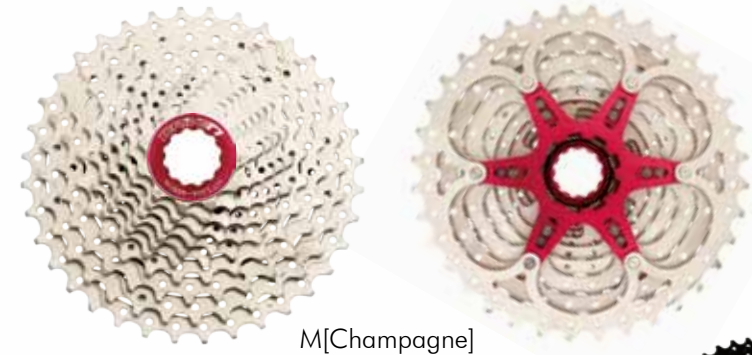

M[Champagne]

CSMX TAW 11-36T
[10-Speed]
[2-Piece Alloy Spider]
[Alloy Spacers]
[6061 Lockring]
[341 g]



CNR1X (S)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Hollow Plates]
S[Silver]
244g/110L





FCMT1 42-32-22T
[6061 Forged Alloy Crank]
[SCM435 Bolts & Nuts]
[Square Taper]



BBS15 BSH
[BC-68/116mm]



CSMS TAW 11-36T
[10-Speed]
[2-Piece Alloy Spider]
M[Champagne]
[348g]



CN10S (S)
[1/2" x 11/128"]
[Chromized Pins & Rollers]
[Chromoly Plates]
S[Silver]
263g/110L



CN10S (I)
[1/2" x 11/128"]
[Chromized Pins & Rollers]
[Chromoly Plates]
I[Silver/Gray]
263g/110L



FCMZ7 (D1) 44-32-22T
[Carbon Reinforced Crank]
[Titanium Axle]
[7075 Chainrings]
[7075 Bolts & Nuts]
[7075 Axle Bolt]
[818g incl. BB]



BBMZ (D1)
[Int. BB FCMZ7]
[127g]



RDMZ LD/MD
[Carbon Cage]
[Forged Alloy Links]
[7075 Pulleys]
[Sealed Cartridge Bearings]
[245g/235g]

[LD]



HBMZ7 F/R9
[Titanium QR Axle]
[7075 Cassette Carrier]
[Sealed Cartridge Bearings]
[198g/343g incl. QR]



HBMD7 F/R9
[Through Axle Type]
[7075 Cassette Carrier]
[Sealed Cartridge Bearings]
[387g/695g incl. QR]




CNM9Z
[Hollow Pins & Plates]
[Chromized Pins]
T[Titanium-Nitride]
[254g/110L]




FCMX7 (D1) 44-32-22T
[6061 Forged Alloy Crank]
[Chromoly Axle]
[7075 Chainrings]
[7075 Bolts & Nuts]
[7075 Axle Bolt]
[851g incl. BB]



BBMX (D1)
[Int. BB FCMX]
[127g]

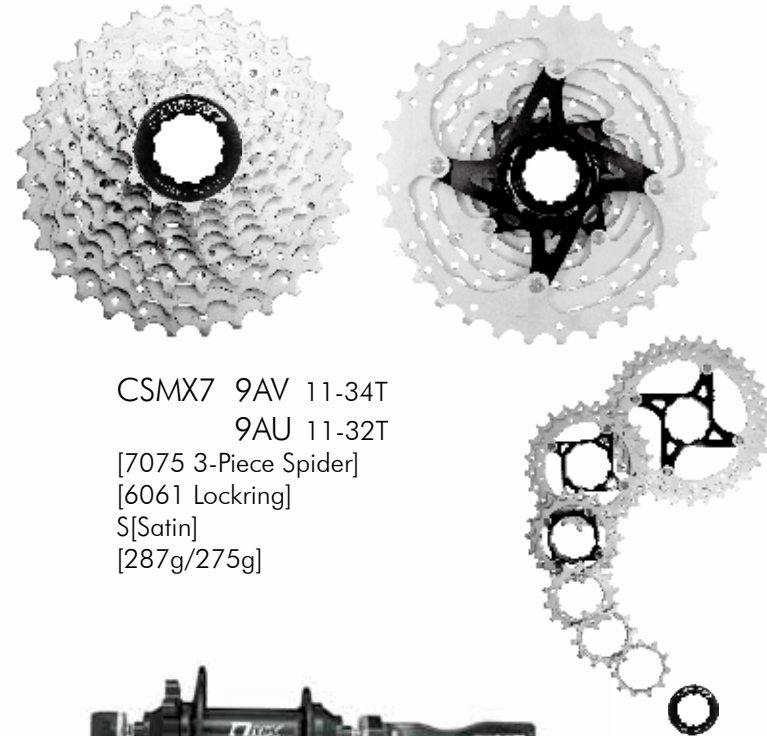

CSMX7 9AV 11-34T
9AU 11-32T
[7075 3-Piece Spider]
[6061 Lockring]
S[Satin]
[287g/275g]



HBMX7 F/R9
[7075 Cassette Carrier]
[Sealed Cartridge Bearings]
[207g/355g incl. QR]



CNM9X
[Hollow Pins & Plates]
[Chromized Pins]
S[Silver]
[254g/110L]




[MD]

[LD]

RDMX LD/MD
[7075 Pulleys]
[Forged Alloy Links]
[Alloy Cage]
[Sealed Cartridge Bearings]
[250g/240g]



S[Silver]

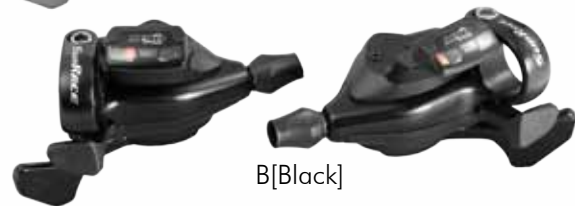

B[Black]

DLM93 R9/L3
[Alloy Up-Shift Lever]



FDM97 LD/MD*/SD*
[44-32-22T or 48-36-26T]
[Alloy Body]
[Dual Pull]
*[Multi Clamp Insert]



FCM99 (S1) [7075 44-32-22T]
FCM97 (S1) [7075 44T]
44-32-22T
[6061 Forged Alloy Crank]
[SCM435 Bolts & Nuts]
[Chromoly Axle]
[7075 Axle Bolt]



BBM97 (S1)
[Int. BB FCM99/97]



CSM99 9AW 11-36T
9BW 12-36T
[Alloy Spider]
[Alloy Lockring]
N[Nickel]



CSM98 9AW 11-36T
9BW 12-36T

CSM96 9AV 11-34T
9AU 11-32T

CSM91* 9AV 11-34T
9AU 11-32T

[Light Weight Design]
*[6061 Lockring]
N[Nickel]



RDM97 LD
[Alloy Links]



CNM99
[Chromized Hollow Pins]
S[Silver]/Y[Gray]



DLM90 R9/L3
[Composite Shift Levers]



SLM96 R9/R8/L3/LF
[Alloy Lever & Clamp]
[Adj. Lever Position]



FDM96 LD/MD*/SD*
[44-32-22T or 48-36-26T]
[Alloy-Steel Body]
[Dual Pull]
*[Multi Clamp Insert]



FCM9A [7075 44T]
FCM9B
44-32-22T
[Square Taper]



BBS15 BSG
[BC-68/113mm]



U[Zinc]



B[Black]

CSM90 9AV 11-34T
9AU 11-32T
[Light Weight Design]
U[Zinc] / B[Black]



HBM96 F/R9



CNM94
[Chromized Pins]
S[Silver] / Y[Gray] / 1[Silver/Gray]



RDM91 LD
[Alloy Bracket]



TSM63 R8/R7/L3/LF
[Force Adjuster]
[Alloy C-Clamp]



HBM63 F/R8



FCM63 42-32-22T
[Alloy I-Crank]



[M]



BBS15 BSK
[BC-68/119mm]



CSM66 8AV 11-34T
8AU 11-32T
8BV 12-34T
8BU 12-32T

CSM63 7AS 11-28T
7BS 12-28T
[Light Weight Design]
N[Nickel]



FDM67 LD/MD*/SD*
[42-32-22T]
[Alloy Clamp]
[Dual Pull]
*[Multi Clamp Insert]

FDM66 LD/MD*/SD*
[42-32-22T]
[Alloy-Steel Clamp]
[Dual Pull]
*[Multi Clamp Insert]



CNM89
[Hollow Pins]
S[Silver]/Y[Gray]



DLM53 R8/R7/L3
[Alloy Up-Shift Lever]



HBM53 F/R8



U[Zinc]

B[Black]

CSM55 8AV 11-34T
8AU 11-32T
[Light Weight Design]
U[Zinc] / B[Black]



FCM52 42-34-24T
[Alloy I-Crank]



[M]



BBS15 BSN
[BC-68/122mm]



FDM56 LD/MD*/SD*
[42-34-24T]
[Alloy-Steel Clamp]
[Dual Pull]
*[Multi Clamp Insert]



RDM57 LD



MFM56 8CV 13-34T
[Lockring Design]
U[Zinc]



CNM84
S[Silver]/Y[Gray]





U[Zinc]



B[Black]

CSM40 7AV 11-34T
7AS 11-28T
[Light Weight Design]
U[Zinc] / B[Black]



RDM41 LD
[13T Tension Pulley]
[Index Cable Adj.]



HBM45 F/R8/R7
[QR or Nuted Type]



MFM4S 7CV 13-34T
[Lockring Design]
[Light Weight Design]
U[Zinc+Black Combination]



[3]

MFM2A 7DV 14-34T
[Lockring Design]
3[Zinc+Black Combination]
2[Brown+Black Combination]



[2]



CNM54
Y[Gray]



DLM33 R8/R7/L3
[Composite Shift Levers]



TSM37 R7/R6/L3/LF
[Cyclops Display]
[Light Action Shift - Both Directions]



FDM34 LD/MD*/SD*
[48-38-28T]
[Alloy-Steel Clamp]
[Dual Pull]
*[Multi Clamp Insert]



FCM33 48-38-28T
[Alloy I-Crank]



[M]



[1]



BBS15 BSU
[BC-68/127mm]



RDM36 SD/SB
[6-Speed]
[Index Cable Adj.]



RDM37 LD/LB/SD/SB
[7-Speed]
[Index Cable Adj.]



MFM30 7CS 13-28T
[Lockring Design]
[Light Weight Design]
C[CP]



MFM3S 7CS 13-28T
[Lockring Design]
[Light Weight Design]
U[Zinc]



MFM20 6DS 14-28T
[Light Weight Design]
U[Zinc]



CNM54
Y[Gray]



TSM27 R7/R6/R5/L3/LF
[Cable Adjuster]
[Light Action Shift - Both Directions]
[TPR Grip]



TSM28 R7/R6/R5/L3/LF
[Cable Adjuster]
[Light Action Shift - Both Directions]
[TPR Grip]



SLM2T R7/R6/R5/LF



FDM2S
SB/ST/MB/MT
[42-34-24T]
[Heat Treated Chainguide]



FDM2A
SB/ST/MB/MT
[48-38-28T]
[Heat Treated Chainguide]



RDM15 LD/LB
SD/SB
[5-Speed]
[Index Cable Adj.]



RDM2T LD/LB
SD/SB
[7 & 6-Speed]
[Index Cable Adj.]



CNM54
Y[Gray]



[3]



[2]

MFM2A 7DV 14-34T
[Lockring Design]
3[Zinc+Black Combination]
2[Brown+Black Combination]



[1]



[2]

MFM2A 7DS 14-28T
6DS 14-28T
5DS 14-28T
[Lockring Design]
1[Zinc+Black Combination]
2[Brown+Black Combination]



TSM10 RF/LF
[Light Action Shift - Both Directions]
[TPR Grip]
[Friction]



SLM10 RF/LF



MFM05 7DS 14-28T
6DS 14-28T
5DS 14-28T
[Friction]



FDM06 SB
[Double]



FDM05 SB/MB
[48-38-28T]
[Friction]



RDM10 LD/LB
[Friction]



CNM22
B[Black]



MFEZ1 TAW 11-36T
[10-speed]
[Alloy Spiders]
[Alloy Spacers]
[Lockring Design]
[Replaceable Cogs]
C[CP]
[653g]



MFEX9 9AU 11-32T
[9-speed]
[Alloy Spider]
[Alloy Spacers]
[Lockring Design]
[Light Weight Design]
[Replaceable Cogs]
C[CP]
[610g]



MFE90 9CU 13-32T
[9-speed]
[Lockring Design]
C[CP]
[Light Weight Design]



MFE60 8CV 13-34T
8CU 13-32T
8CS 13-28T
[8-speed]
[Lockring Design]
C[CP]
[Light Weight Design]

NRZ 11s



CSRZ1 EAS 11-28T
EAU 11-32T

[Alloy Spider]
[Alloy Spacers]
[Alloy Lockring]
T[Titanium-Nitride]



CN11Z
[Hollow Pins & Plates]
[Chromized Hollow Pins & Rollers]
T[Titanium-Nitride]
[244g/110L]

NRX 11s



M[Champagne]

CSRX1 EAS 11-28T
EAU 11-32T

[Alloy Spider]
[Alloy Spacers]
[Alloy Lockring]



O[Black Chrome]



CN11X
[Hollow Pins & Plates]
[Chromized Hollow Pins & Rollers]
T[Titanium-Nitride]
S[Silver]
[244g/110L]

NRZ



STRZ RT/L2
[Carbon Reinforced Brake Lever]
[7075 Forged Alloy Up-Shift Lever]
[Teflon® Coated Cable]
[383g/pair]



RDRZ2 SD
[Carbon Reinforced Link]
[Carbon Cage]
[Carbon Cable Adj.]
[7075 Pulleys]
[Ceramic Cartridge Bearings]
[7075 Bracket Bolt]
[10 & 9-Speed]
[202g]





FCRZ6 [D2] 50-34T FCRZ1 [D2] 53-39T
Z7 [D2] 50-36T Z3 [D2] 52-39T
[BCD 110mm] [BCD 130mm]

[Carbon Crank]
[Titanium Axle]
[7075 Chainrings]
[7075 Bolts & Nuts]
[7075 Axle Bolt]
[733~753g incl. BB]



BBRZ [D1]
[112g]
[Int. BB FCRZ]



FDRZ BB
[56~50T Double]
[Carbon Reinforced Cage]
[Forged Alloy Links]
[102g]



BCRZ3 F/R
[Quick-Release]
[CNC Alloy Caliper]
[Titanium Hardware]
[Cartridge Brake Shoe Pads]
[Convex Washer Adj. Shoes]
[SwissStop® Yellow King™ Pads]
[For Carbon Rim]
[281g/pair]



BCRZ2 F/R
[Quick-Release]
[CNC Alloy Caliper]
[Titanium Hardware]
[Cartridge Brake Shoe Pads]
[Convex Washer Adj. Shoes]
[SwissStop® GHPII™ Pads]
[281g/pair]



CNR1Z
[Hollow Pins & Plates]
[Chromized Hollow Pins & Rollers]
T[Titanium-Nitride]
[244g/110L]





O[Black Chrome]



M[Champagne]


CSRX TAQ 11-25T*
TAS 11-28T*
TAU 11-32T
TBS 12-28T*
TBU 12-32T

[Alloy Spider]

[Alloy Spacers]

[Alloy Lockring]

* [Available in Black Chrome]
[236~304g]

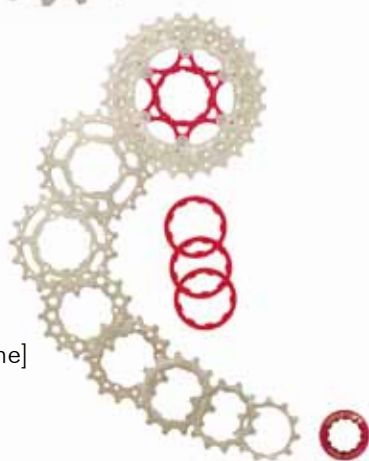

STRX RT/L2

[Forged Alloy Brake Lever]

[7075 Forged Alloy Up-Shift Lever]

[Teflon® Coated Cable]

[387g]



FCRX6 [D1] 50-34T
X7 [D1] 50-36T
[BCD 130mm]

FCRX1 [D1] 53-39T
X3 [D1] 52-39T
[BCD 110mm]



BBRX [D1]
[Int. BB FCRX]
[125g]

[6061 Forged Alloy Crank]

[Chromoly ISIS Axle]

[7075 Chainrings]

[7075 Bolts & Nuts]

[7075 Axle Bolt]

[944~956g incl. BB]



RDRX2 SD
 [Forged Alloy Links]
 [Alloy Cage]
 [7075 Pulleys]
 [Sealed Cartridge Bearings]
 [7075 Bracket Bolt]
 [10 & 9-Speed]
 [211g]



BCRX3 F/R
 [Quick-Release]
 [CNC Alloy Caliper]
 [Chromoly Hardware]
 [Cartridge Brake Shoe Pads]
 [Convex Washer Adj. Shoes]
 [SwissStop® Yellow King™ Pads]
 [For Carbon Rim]
 [325g/pair]



BCRX2 F/R
 [Quick-Release]
 [CNC Alloy Caliper]
 [Chromoly Hardware]
 [Cartridge Brake Shoe Pads]
 [Convex Washer Adj. Shoes]
 [SwissStop® GHPII™ Pads]
 [325g/pair]



FDRX BB
 [56~50T Double]
 [Forged Alloy Links]
 [99g]



CNR1X
 [Hollow Pins & Plates]
 [Chromized Hollow Pins & Rollers]
 S[Silver]
 [244g/110L]





STRS RT/L2
 [Forged Alloy Brake Lever]
 [Rubber Cushioned Up-Shift Lever]
 [Teflon® Coated Cable]
 [418g]



FCRS6 (S1) 50-34T **FCRS1 (S1) 53-39T**
 [BCD 110mm] [BCD 130mm]
 [6061 Forged Alloy Crank]
 [Alloy Chainrings]
 [7075 Bolts & Nuts]
 [7075 Axle Bolt]
 [944g/949g incl. BB]



BBRS (S1)
 [Int. BB FCRS]
 [125g]



CSRS **TAQ 11-25T**
 TAS 11-28T
 TAU 11-32T
 TBS 12-28T
 TBU 12-32T

[Alloy Spider]
 M[Champagne]
 [242~309g]





RDRS1 SD
[Alloy Bracket & Outer Link]
[Alloy Cage]
[Sealed Cartridge Bearing Pulleys]
[7075 Bracket Bolt]
[10 & 9-Speed]
[212g]



FDRS0 BB/LB/MB*
[56~50T Double]
[Forged Alloy Links]
*[Multi Clamp Insert]
[99g]



S[Silver]

B[Black]

BCRS F/R
[Quick-Release]
[Forged Alloy Caliper]
[Cartridge Brake Shoe Pads]
[Convex Washer Adj. Shoes]
[368g/pair]



CNR10
[Hollow Pins]
[Chromized Hollow Pins & Rollers]
S[Silver]



CN10S
[Chromized Hollow Pins & Rollers]
S[Silver] / 1[Silver/Gray] / Y[Gray]



STR90 R9/L2/L3
[Forged Alloy Brake Lever]
[Rubber Cushioned Up-Shift Lever]
[418g/pair]



SLR91 R9/LF
[High - Polished]
B [28.6mm]
C [44mm]
F [50mm]



SLR96 R9/LF
B [Bar End]



CSR91 9AQ 11-25T
9AS 11-28T
9BU 12-25T
[Alloy Lockring]
[Light Weight Design]
N [Nickel]



FDR99 BB/LB/MB* [50T]
[Triple]
[Forged Alloy Links]
* [Multi Clamp Insert]



FDR90 BB/LB/MB*
[56~50T Double]
[Forged Alloy Links]
* [Multi Clamp Insert]



CNM99
[Chromized Hollow Pins]
S [Silver]/Y [Gray]



CNM94
[Chromized Pins]
S [Silver]/ 1 [Silver/Gray] / Y [Gray]



FCR9F 50-34T
FCR9A 53-39T
[Alloy Chainrings]
[SCM435 Bolts & Nuts]
[6061 Forged Alloy Crank]



FCR96 50-34T
FCR91 53-39T
[SCM435 Bolts & Nuts]
[6061 Forged Alloy Crank]



RDR91 SD/LD
[Alloy Bracket & Outer Link]
[9-Speed]



BBS18 BSA/BSF
[BC-68/(103mm FCR9F)/(111mm FCR9A)]
[Alloy RH & LH Cups]
[Alloy Sleeve]



BBS15 BSA/BSF
[BC-68/(103mm FCR96)/(111mm FCR91)]



BCR91 F/R
[Quick-Release]
[Alloy Caliper]
[Cartridge Brake Shoe Pads]



BCR90 F/R
[Quick-Release]
[Forged Alloy Caliper]
[Cartridge Brake Shoe Pads]



STR80 R8/L2/L3
[Forged Alloy Brake Lever]
[Rubber Cushioned Up-Shift Lever]
[418g/pair]



SLR80 [High-Polished]
Braze on: R8/LF
Clamp: 8F
B [28.6mm]
C [44mm]
F [50mm]
H [22.2mm]
G [25.4mm]
D [28.6mm]



CSR86 8AO 11-23T
8AS 11-28T
8BQ 12-25T
CSR63 7AP 11-24T
7BP 12-24T
N[Nickel]
[Light Weight Design]



FDR87 BB/MB/SB*
[52T Triple]
[Forged Alloy Links]
*[Multi Clamp Insert]



FDR80 BB/MB/SB*
[56~50T Double]
[Forged Alloy Links]
*[Multi Clamp Insert]



CNM89
[Hollow Pins]
S[Silver]/Y[Gray]



CNM84
S[Silver]/Y[Gray]



FCR86 50-34T
[6061 Forged Alloy Crank]
[SCM435 Bolts & Nuts]



FCR81 53-39T
FCR83 52-42T
FCR87 52-42-30T
[6061 Forged Alloy Crank]
[SCM435 Bolts & Nuts]



RDR81 SD/LD
[Alloy Bracket & Outer Link]
[8-Speed]



BBS15 BSB/BSA/BSF
[BC-68/(107mm FCR81/83)
/(103mm FCR86)
/(111mm FCR87)]



BCR81 F/R
[Quick-Release]
[Alloy Caliper]



BCR80 F/R
[Quick-Release]
[Forged Alloy Caliper]



BLR31



SLR30

Brazed on: R7/R6/LF B [28.6mm]
C [44mm]
Clamp: 7F/6F H [22.2mm]
G [25.4mm]
D [28.6mm]



FCR31 53-39T
FCR33 52-42T
[6061 Forged Alloy Crank]
[SCM435 Bolts & Nitel]
[Friction]



BBS15 BSB
[BC-68/107mm]



MFR30 7CQ 13-25T
C[CP]
[Lockring Design]
[Light Weight Design]



MFR2A 6DP 14-24T
1 [Zinc+Black Combination]



FDR31 SB/MB
[53~52T Double]



RDR37 SD
[7 & 6-Speed]



CNM54
Y[Gray]




BCR30 F/R
[Forged Alloy Caliper]



BLR02



SLR03 FF/RF
Clamp:(H) 22.2mm (D)28.6mm

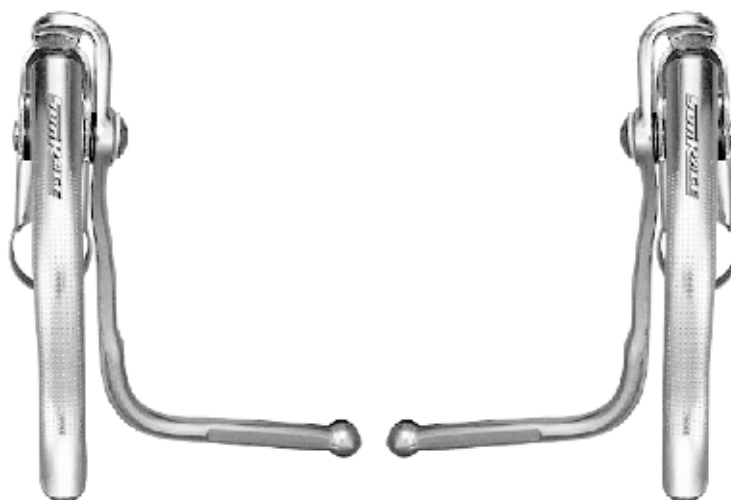

BLR03



CNM22 (B)
[1/2" x 3/32"]
B[Black]

Bottom Brackets

(ISIS)



BBI40
[Hollow SCM435 Axle]
[Alloy RH & LH Cups]
[Alloy Sleeve]
[Alloy Stopper]
[Sealed Cartridge Bearings x 4]



BBI30
[Hollow SCM435 Axle]
[Alloy RH & LH Cups]
[Eng. Polymer Sleeve]
[Alloy Stopper]
[Sealed Cartridge Bearings]



BBI20
[Hollow SCM435 Axle]
[Alloy Cups]
[Alloy Sleeve]
[SCM415 Stopper]
[Sealed Cartridge Bearings]



BBI10
[Hollow SCM435 Axle]
[Steel RH & LH Cups]
[Steel Sleeve]
[SCM415 Stopper]
[Sealed Cartridge Bearings]

(Square Taper)



BBS18
[Steel Axle]
[Alloy RH & LH Cups]
[Alloy Sleeve]
[Eng. Polymer Stopper]
[Sealed Cartridge Bearings]



BBS15
[Steel Axle]
[Steel RH & LH Cups]
[Steel Sleeve]
[Eng. Polymer Stopper]
[Sealed Cartridge Bearings]



BBS08 B [BC1.37]
[Steel Axle]
[Eng. Polymer RH & LH Cups]
[Steel Sleeve]
[Eng. Polymer Stopper]
[Sealed Cartridge Bearings]



BBS08 5[35mm]
8[38mm]
4[40mm]
[Steel Axle]
[Eng. Polymer RH & LH Cups]
[Steel Sleeve]
[Eng. Polymer Stopper]
[Sealed Cartridge Bearings]

Bottom Brackets



BBS05
[Steel Axle]
[Steel RH & LH Cups]
[Eng. Polymer Sleeve]
[Ball Cage Bearings]



BBT08 B[BC1.37]
[Steel Axle]
[Eng. Polymer RH & LH Cups]
[Steel Sleeve]
[Eng. Polymer Stopper]
[Sealed Cartridge Bearings]



BBT08 5[35mm]
8[38mm]
4[40mm]
[Steel Axle]
[Eng. Polymer RH & LH Cups]
[Steel Sleeve]
[Eng. Polymer Stopper]
[Sealed Cartridge Bearings]

BB Axle Bolt [ISIS]
[M12 & M15 Option]
[Alloy Cup]



BAI42
[M12 Chromoly Bolt]
BAI30
[M15 Alloy Bolt]
BAI20
[M15 Chromoly Bolt]



BAI41
[M12 Chromoly Bolt]
[Plastic Cap]
BAI08
[M15 Chromoly Bolt]
[Plastic Cap]

BB Axle Bolt
[M8]



BAS05
[M8 Chromoly Bolt]



BAS15
[M8 Chromoly Bolt]
[Plastic Cap]

Outer Casings / Inner Cables

Shift



OCSXP - XP Index Type Ø4.5mm



OCSSP - SP Index Type Ø4mm B[Black]




OCS2S - 2SP Index Type Ø4mm B[Black]

Color options available



OCSSP - SP Index Type Ø4mm Y[Gray]



OCS2S - 2SP Index Type Ø4mm Y[Gray]

Ferrules



OFS95[ID4.5mm]
OFS90[ID4mm]
[Alloy]
[Sealed]



OFS80[ID4mm]
[Alloy]



OFS50[ID4mm]
[Brass]



OFS10[ID4mm]
[Plastic]

Crimps



[A]



[G]

INS60
[Alloy]
[ID1.6mm]



ICSTF - Teflon® Stainless Ø1.1mm
ICSSS - Slick Stainless Ø1.1mm
ICSSG - Slick Galvanized Ø1.1mm
ICSRG - Regular Galvanized Ø1.2mm
[Shift Cable]

Brake



OCBXP - XP Type Ø5mm S[Silver]



OCB2X - 2X Type Ø5mm S[Silver]



OCB2P - 2P Type Ø5mm B[Black]



OCB2P - 2P Type Ø5mm Y[Gray]



ICBTF - Teflon® Stainless Ø 1.5mm
ICBSS - Slick Stainless Ø 1.5mm
ICBSG - Slick Galvanized Ø 1.5mm
ICBRG - Regular Galvanized Ø 1.6mm
[Universal Brake Cable]



ICRTRF - Teflon® Stainless Ø 1.5mm
ICRSS - Slick Stainless Ø 1.5mm
ICRRG - Regular Galvanized Ø 1.6mm
[Road Brake Cable]

Ferrules



OFB90 [ID5mm]
[Alloy]
[Sealed]



OFB80 [ID5mm]
[Alloy]



OFB50 [ID5mm]
[Brass]



OFB10 [ID5mm]
[Plastic]

Crimps



INB60
[Alloy]
[ID2.1mm]

[A]



[B]



[G]



[R]



[2]

Chains

(11-Speed)



CN11Z (T)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Hollow Plates]
T[Titanium-Nitride]
245g/110L



CN11X (S)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Hollow Plates]
S[Silver]
245g/110L

(10-Speed)



CNR1Z (T)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Hollow Plates]
T[Titanium-Nitride]
244g/110L



CNR1X (S)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Hollow Plates]
S[Silver]
244g/110L



CNR10 (S)
[1/2" x 11/128"]
[Chromized Hollow Pins & Rollers]
[Chromoly Plates]
S[Silver]
246g/110L



CN10S (S)
[1/2" x 11/128"]
[Chromized Pins & Rollers]
[Chromoly Plates]
S[Silver]
263g/110L



CN10S (1)
[1/2" x 11/128"]
[Chromized Pins & Rollers]
[Chromoly Plates]
1 [Silver/Gray]
263g/110L

(9-Speed)



CNM9Z (T)
[1/2" x 11/128"]
[Chromized Hollow Pins]
[Chromoly Hollow Plates]
T[Titanium-Nitride]
254g/110L



CNM9X (S)
[1/2" x 11/128"]
[Chromized Hollow Pins]
[Chromoly Hollow Plates]
S[Silver]
254g/110L



CNM99 (S)
[1/2" x 11/128"]
[Chromized Hollow Pins]
[Chromoly Plates]
S[Silver]
256g/110L



CNM99 (Y)
[1/2" x 11/128"]
[Chromized Hollow Pins]
[Chromoly Plates]
Y[Gray]
256g/110L



CNM94 (S)
[1/2" x 11/128"]
[Chromized Pins]
[Chromoly Plates]
S[Silver]
273g/110L



CNM94 (1)
[1/2" x 11/128"]
[Chromized Pins]
[Chromoly Plates]
1[Silver/Gray]
273g/110L



CNM94 (Y)
[1/2" x 11/128"]
[Chromized Pins]
[Chromoly Plates]
Y[Gray]
273g/110L

(8-Speed)



CNM89 (S)
[1/2" x 3/32"]
[Chromized Hollow Pins]
S[Silver]
257g/110L



CNM84 (S)
[1/2" x 3/32"]
S[Silver]
274g/110L



CNM84 (Y)
[1/2" x 3/32"]
Y[Gray]
274g/110L

Chains

[7 & 6-Speed]



CNM54 (Y)
[1/2" x 3/32"]
Y[Gray]

[Friction]



CNM22 (B)
[1/2" x 3/32"]
B[Black]

[Fixed / BMX]



CNX46 (S)
[1/2" x 1/8"]
S[Silver]



CNX58 (S)
[1/2" x 3/32"]
S[Silver]



CNX56 (S)
[1/2" x 1/8"]
[Hollow Pins]
S[Silver]



CNX59 (S)
[1/2" x 3/32"]
[Hollow Pins]
S[Silver]

[Single Speed / Internal Gear Hub]



CNS22 (D)
[1/2" x 3/32"]
D[Dacromet]



CNS12
[1/2" x 1/8"]
[Hollow Outer Plates]
S[Silver]



CNS10 (D)
[1/2" x 1/8"]
D[Dacromet]



CNS10 (B)
[1/2" x 1/8"]
B[Black]

[Guide Pins]

- CNP11 [11 Speed]
- CNP10 [10 Speed]
- CNP09 [9 Speed]
- CNPX1 [1/8" CNX]
- CNPX3 [3/32" CNX]



[Easy Links]

- CNU11 [11 Speed]
- CNU10 / CNQ10 [10 Speed]
- CNU09 / CNQ09 [9 Speed]
- CNU87 / CNQ87 [8/7 Speed]



Brake Pads for Disc Brakes

*Please refer to page 89

SHIMANO® COMPATIBLE



DPS30



DPS20



DPS15



DPS10

Shimano® is a registered trademark and brand name owned by Shimano Inc.

HAYES® COMPATIBLE



DPH35



DPH25



Hayes® is a registered trademark and brand name owned by Hayes Bicycle Group, a division of HB Performance Systems, Inc.

MAGURA® COMPATIBLE



DPMM1



DPML7



DPMJ1



Magura® is a registered trademark and brand name owned by Gustav Magenwirth GmbH & Co. KG

AVID® COMPATIBLE



DPA10

FORMULA® COMPATIBLE



DPF10

TEKTRO® COMPATIBLE



DPT10

Avid® is a registered trademark and brand name owned by SRAM Corporation.

Formula® is a registered trademark and brand name owned by Formula S.R.L.

Tektro® is a registered trademark and brand name owned by Tektro Technology Corporation.

Brake Shoes for Road



BSRZ3

[Alloy Cartridge Body]
[Titanium Hardware]
[SwissStop® Yellow King™ Pads]
[For Carbon Rim]
[Convex Washer Adj. Shoes]



BSRZ2

[Alloy Cartridge Body]
[Titanium Hardware]
[SwissStop® GHPII™ Pads]
[Convex Washer Adj. Shoes]



BSRX3

[Alloy Cartridge Body]
[Chromoly Hardware]
[SwissStop® Yellow King™ Pads]
[For Carbon Rim]
[Convex Washer Adj. Shoes]



BSRX2

[Alloy Cartridge Body]
[Chromoly Hardware]
[SwissStop® GHPII™ Pads]
[Convex Washer Adj. Shoes]



BSRS

[Alloy Cartridge Body]
[Chromoly Hardware]
[Convex Washer Adj. Shoes]



BSR90

[Alloy Cartridge Body]
[Chromoly Hardware]



BSR80



Brake Pads for Road



BPRZ3

[SwissStop® Yellow King™ Pads]
[For Carbon Rim]



BPRX2

[SwissStop® GHPII™ Pads]



BPR90



Brake Shoes for ATB/MTB



BSM96
[Alloy Cartridge Body]
[Chromoly Hardware]
[BPM96 Pad]



BSM90
[Alloy Cartridge Body]
[Chromoly Hardware]
[Satin Finish]
[BPM90 Pad]



BSM60
[Alloy Cartridge Body]
[Chromoly Hardware]
[BPM60 Pad]



BSM30
[T3/T4 Type]



BSM20
[T2 Type]



A[Silver] B[Black]
BCMSP.M2F 90°
M2R 135°



A[Silver] B[Black]
BCMSP.M1F 90°
M1R 135°



BCMSP.B1



Brake Pads for ATB/MTB



BPM96
[Tri-Compound Rubber]
[Severe Condition]
[Mud-Proof]
[High Performance]
[Squeal-Free]



BPM95
[Tri-Compound Rubber]
[Severe Condition]
[High Performance]



BPM90



BPM60

Service Parts



SP880 R[Red]
Rear Derailleur Pulley
[11T]
[7075 Alloy/CNC]
[Ceramic Cartridge Bearing]



SP860 G[Gold]
S [Silver]
Rear Derailleur Pulley
[11T]
[7075 Alloy/CNC]
[Sealed Cartridge Bearing]



SP856
Rear Derailleur Pulley
[11T]
[Sealed Cartridge Bearing]



SP853
Tension Pulley
[11T]
[Steel Bushing]

SP852
Guide Pulley
[11T]
[Steel Bushing]



SP850
Rear Derailleur Pulley
[10T]



QRM1R



QRM1F

Quick Release
[Titanium Axle & Lever]
[Alloy Nut]



QRZ7R



QRZ7F

Quick Release
[Titanium Axle]
[Alloy Lever & Nut]



QRX7R



QRX7F

Quick Release
[SCM435 Axle]
[Alloy Lever & Nut]

BB Axle Bolt [ISIS]
[M12 & M15 Option]
[Alloy Cup]



BAI42
[M12 Chromoly Bolt]
BAI30
[M15 Alloy Bolt]
BAI20
[M15 Chromoly Bolt]

BB Axle Bolt
[M8]



BAI41
[M12 Chromoly Bolt]
[Plastic Cap]
BAI08
[M15 Chromoly Bolt]
[Plastic Cap]



BAS05
[M8 Chromoly Bolt]



BAS15
[M8 Chromoly Bolt]
[Plastic Cap]



SP131
Casing Stop



S[Silver] G[Gold]

SP210
Bolt & Nut Set for Chainrings
[7075 Alloy]



SPFDC.A01L.BD0 [ø34.9]
SPFDC.A01M.BD0 [ø31.8]
SPFDC.A01S.BD0 [ø28.6]
Front Derailleur Clamp
[Forged Alloy]
[ø34.9, ø31.8, ø28.6mm Option]



SP550
Rear Derailleur Bracket



TLEF1 TLCS1 TLFW1

TLEF1
Freewheel Lock Ring Tool
[for MFEZ/X]

TLCS1
Cassette Lock Ring Tool
TLFW1

Freewheel Removal Tool



GPM50
O [Open]/C [Closed]
End Grip - TPR
[Open 80mm]
[Closed 86mm]



SP711 [11T]
SP712 [12T]
SP721 [11T Campy]
SP722 [12T Campy]
Lock Ring For Cassettes
[Forged Alloy]



CRMX0.44 [44T_w/CNC]
CRMX0.32 [32T]
CRMX0.22 [22T]

Chainring Combinations
[7075 Alloy]



CRRX0.53 [53T]
CRRX0.52 [52T]
CRRX0.39 [39T]
CRRX0.50 [50T]
CRRX0.34 [34T]
CRRX1.50 [50T]
CRRX1.36 [36T]

Chainring Combinations
[7075 Alloy/CNC]



CRRS0.53 [53T_w/CNC]
CRRS0.39 [39T]
CRRS0.50 [50T_w/CNC]
CRRS0.34 [34T]

Chainring Combinations
[Alloy]

After Market

DRIVEN



SunRACE



SunRACE

BP - Blister Pack



HP - Header Plastic



After Market

HC - Header Cover



ZB - Zipper Bag



Trigger Shifters

Model No.	DLM93		DLM90		DLM53			DLM33		
	R9	L3	R9	L3	R8	R7	L3	R8	R7	L3
Side and Speed	Right 9-Speed	Left 3-Speed	Right 9-Speed	Left 3-Speed	Right 8-Speed	Right 7-Speed	Left 3-Speed	Right 8-Speed	Right 7-Speed	Left 3-Speed
Display Type	Podium Top		Podium Top		Podium Top			Podium Top		
Cable Adjuster	●		●		●			●		
Clamp Screw	SUS302 Stainless Steel		SUS302 Stainless Steel		SCM435 Chromoly			SCM435 Chromoly		
Large Lever	Aluminum		Engineering Polymers		Aluminum			Engineering Polymers		
Small Lever	Engineering Polymers		Engineering Polymers		Engineering Polymers			Engineering Polymers		
Cable Type	Slick-Galvanized		Slick-Galvanized		Slick-Galvanized			Galvanized		
Cable Length	2,050mm	1,600mm	2,050mm	1,600mm	2,050mm		1,600mm	2,050mm		1,600mm
Casing Compatibility	SP		SP		SP	2SP & ↑	2SP & ↑	SP	2SP & ↑	2SP & ↑
Finish	(S) Silver / (B) Black		Black		Black			Black		
Average Weight	156g	153g	158g	157g	156g	156g	154g	158g	158g	157g

* Handlebar diameter 22.2 ±0.2 mm / Tighten torque 60 ~ 80 kgf-cm

Twist Shifters

Model No.	TSM63			
	R8	R7	L3	LF
Side and Speed	Right 8-Speed	Right 7-Speed	Left 3-Speed	Left Friction
Cyclops Display	✕			
Force Adjuster	●			
Cable Adjuster	●			
Clamp Type	C-Clamp			
Cable Type	Slick-Galvanized			
Cable Length	1,850mm		1350mm	
Casing Compatibility	SP	2SP & ↑	2SP & ↑	2SP & ↑
Handle Bar Diameter	22.2mm*			
Average Weight	109g	109g	107g	107g

* Tighten Torque of 15 ~ 25 kgf-cm

Model No.	TSM37			
	R7	R6	L3	LF
Side and Speed	Right 7-Speed	Right 6-Speed	Left 3-Speed	Left Friction
Cyclops Display	●			
Cable Adjuster	●			
Clamp Type	C-Clamp			
Cable Type	Slick-Galvanized			
Cable Length	1,900mm		1,400mm	
Casing Compatibility	2SP & ↑	2SP & ↑	2SP & ↑	2SP & ↑
Handle Bar Diameter	22.2mm*			
Average Weight	89g	89g	86g	86g

* Tighten Torque of 15 ~ 25 kgf-cm

Twist Shifters

Model No.	TSM28 / TSM27				
	R7	R6	R5	L3	LF
Side and Speed	Right 7-Speed	Right 6-Speed	Right 5-Speed	Left 3-Speed	Left Friction
Cable Adjuster	●			●	
C-Clamp	×			×	
Cable Type	Slick-Galvanized			Slick-Galvanized	
Cable Length	1,900mm			1,400mm	
Casing Compatibility	2SP & ↑			2SP & ↑	2SP & ↑
Handle Bar Diameter	22.2mm*			22.2mm*	
Average Weight	90g	90g	90g	87g	87g

* Tighten Torque of 15 ~ 17 kgf-cm

Model No.	TSM10	
	RF	LF
Side and Speed	Right Friction	Left Friction
Cable Adjuster	×	
C-Clamp	×	
Cable Type	Galvanized	
Cable Length	1,900mm	1,400mm
Casing Compatibility	2SP & ↑	2SP & ↑
Handle Bar Diameter	22.2mm*	
Average Weight	86g	86g

* Tighten Torque of 15 ~ 17 kgf-cm

Thumb Shifters

Model No.	SLM96			
	R9	R8	L3	LF
Side and Speed	Right 9-Speed	Right 8-Speed	Left 3-Speed	Left Friction (3/2)
Lever Position Adjust	●	●	●	●
Lever Material	Aluminum / High-Polished		Aluminum / High-Polished	
Clamp Material	Aluminum		Aluminum	
Cable Adjuster	×		×	
Cable Type	Slick-Galvanized		Slick-Galvanized	
Cable Length	1,950mm		1,450mm	
Casing Compatibility	SP & ↑		SP & ↑	2SP & ↑
Handle Bar Diameter	22.2mm*		22.2mm*	
Average Weight	87g	87g	85g	85g

* Tighten Torque of 20~ 25 kgf-cm

Model No.	SLM2T				SLM10	
	R7	R6	R5	LF	RF	LF
Side and Speed	Right 7-Speed	Right 6-Speed	Right 5-Speed	Left Friction (3/2)	Right Friction (7/6/5)	Left Friction (3/2)
Lever Material	Engineering Polymers			Engineering Polymers	Aluminum	Aluminum
Clamp Material	Steel			Steel	Steel	Steel
Cable Adjuster	×			●	×	
Cable Type	Galvanized			Galvanized	Galvanized	
Cable Length	1,900mm			1,450mm	1,950mm	1,450mm
Casing Compatibility	2SP & ↑			2SP & ↑	2SP & ↑	
Handle Bar Diameter	22.2mm*			22.2mm*	22.2mm*	
Average Weight	64.5g	64.5g	64.5g	65g	64.5g	61.5g

* Tighten Torque of 20~ 25 kgf-cm

Front Cranksets

Model No.	FCMZ7 (D1)	FCMX7 (D1)	FCM99 (S1)	FCM97 (S1)
Compatibility	9-Speed	9-Speed	9-Speed	9-Speed
Function	Super Fluid Drive™	Super Fluid Drive™	Super Fluid Drive™	Super Fluid Drive™
Crank Arm Spline Type	Integrated ISIS External BB (D1)	Integrated ISIS External BB (D1)	Integrated ISIS External BB (S1)	Integrated ISIS External BB (S1)
Number of Teeth	44-32-22T	44-32-22T	44-32-22T	44-32-22T
Outer Chainring	7075 Aluminum / Anodized / CNC	7075 Aluminum / Anodized / CNC	7075 Aluminum / Anodized	7075 Aluminum / Anodized
Middle Chainring	7075 Aluminum / Anodized	7075 Aluminum / Anodized	7075 Aluminum / Anodized	Hi-Tensile Steel / Painted
Inner Chainring	7075 Aluminum / Anodized	7075 Aluminum / Anodized	7075 Aluminum / Anodized	Hi-Tensile Steel / Painted
Removable Chainrings	●	●	●	●
Chainguard Option	●	●	●	●
Crank Arms	Carbon Reinforced 6061	6061 Aluminum Forged / High-Polished Anodized	6061 Aluminum Forged / Anodized	6061 Aluminum Forged / Anodized
Crank Arm Length	175mm	175mm	175mm	175mm
Axle Material	Titanium	Chromoly	Chromoly	Chromoly
Axle Diameter	Ø 24mm	Ø 24mm	Ø 24mm	Ø 24mm
Axle Bolt	7075 Aluminum	7075 Aluminum	7075 Aluminum	7075 Aluminum
Chainring Bolts & Nuts	7075 Aluminum / Gold Anodized	7075 Aluminum / Silver Anodized	SCM435 Chromoly	SCM435 Chromoly
Bolt Circle Diameter	104mm/64mm	104mm/64mm	104mm/64mm	104mm/64mm
Bottom Bracket (Included)	Model	BBMZ (D1)*	BBM97 (S1)*	BBM97 (S1)*
	Adapter	Aluminum / Gold Anodized	Aluminum / Silver Anodized	Aluminum / Silver Anodized
	Shell Width	BSA 68 /73mm	BSA 68 /73mm	BSA 68 /73mm
	Chain Line	50mm	50mm	50mm
	Weight	127g	127g	127g
Crank (R) Weight	476g (175)	525g (175)	529g (175)	597g (175)
Crank (L) Weight	215.5g (175)	199g (175)	207g (175)	207g (175)
Total Average Weight	818g (175)	851g (175)	863g (175)	931g (175)

* Not compatible with Shimano MTB

Front Cranksets

Model No.	FCMT1	FCM9A	FCM9B
Compatibility	10-Speed	9-Speed	9-Speed
Function	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive Plus™
Crank Arm Spline Type	Square Taper	Square Taper	Square Taper
Number of Teeth	42-32-22T	44-32-22T	44-32-22T
Outer Chainring	Hi-Tensile Steel	7075 Aluminum / Anodized	Hi-Tensile Steel
Middle Chainring	Hi-Tensile Steel	Hi-Tensile Steel	Hi-Tensile Steel
Inner Chainring	Hi-Tensile Steel	Hi-Tensile Steel	Hi-Tensile Steel
Removable Chainrings	●	●	●
Chainguard Options	●	●	●
Crank Arms	6061 Aluminum Forged / High-Polished Anodized	Forged Aluminum / Black Anodized	Forged Aluminum / Black Anodized
Crank Arm Length	172.5mm	175mm	175mm
Chainring Bolts & Nuts	SCM435 Chromoly	SCM435 Chromoly	SCM435 Chromoly
Bolt Circle Diameter	104mm/64mm	104mm/64mm	104mm/64mm
Bottom Bracket (Optional)	Model	BBS15	BBS15
	Shell Width	(S) 68mm	(S) 68mm
	Spindle Length	(H) 116mm	(G) 113mm
	Chain Line	50mm	50mm
Average Weight	776g (175)	814g (175)	950g (175)

Model No.	FCM63	FCM52	FCM33
Compatibility	8 / 7-Speed	8 / 7-Speed	7 / 8-Speed
Function	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive™
Number of Teeth	42-32-22T	42-34-24T	48-38-28T
Outer Chainring	Hi-Tensile Steel	Hi-Tensile Steel	Hi-Tensile Steel
Middle Chainring	Hi-Tensile Steel	Hi-Tensile Steel	Hi-Tensile Steel
Inner Chainring	Hi-Tensile Steel	Hi-Tensile Steel	Hi-Tensile Steel
Chainguard Options	Ring Type	Ring Type	(M) Full Type / (1) Ring Type
Crank Style	I-Crank	I-Crank	I-Crank
Crank Arms	A356.2 Aluminum	A356.2 Aluminum	A356.2 Aluminum
Crank Arm Length (mm)	175/170mm	175/170/165/162.5/152mm	175/170/165/162.5/152mm
Bottom Bracket (Optional)	Model	BBS15	BBS15
	Shell Width	(S) 68mm	(S) 68mm
	Spindle Length	(K) 119mm	(U) 127mm
	Chain Line	50mm	50mm
Average Weight	885g (175)	920g (175)	1,035g (175)

Front Derailleurs

Model No.	FDM97	FDM96	FDM67	FDM66	FDM56	FDM34
Rear Compatibility	9-Speed		8 / 7-Speed		8 / 7-Speed	
Chainring Compatibility	Triple		Triple		Triple	
Top Gear Teeth	44T or 48T		42T		42T	48T
Top-Low Max. Capacity	22T		20T		18T	20T
Top-Middle Min. Capacity	12T		10T		8T	10T
Cable Routing	(D) Dual Pull		(D) Dual Pull		(D) Dual Pull	
Clamp Diameter	(L) 34.9 / (M) 31.8* / (S) 28.6*mm		(L) 34.9 / (M) 31.8* / (S) 28.6*mm		(L) 34.9 / (M) 31.8* / (S) 28.6*mm	
Clamp Material	Aluminum	Aluminum-Steel	Aluminum	Aluminum-Steel	Aluminum-Steel	
Chain Stay Angle	66~69 °		66~69 °		66~69 °	
Average Weight	144g (M)	153g (M)	141g (M)	150g (M)	150g (L)	145 (L)

* With multi clamp band inserts which convert 34.9mm to 31.8mm or 28.6mm

Model No.	FDM2A	FDM2S
Rear Compatibility	7 / 6-Speed	
Chainring Compatibility	Triple	
Top Gear Teeth	48T	42T
Top-Low Max. Capacity	20T	18T
Top-Middle Min. Capacity	10T	8T
Clamp Diameter	(M) 31.8 / (S) 28.6mm	
Cable Routing	(T) Top Pull / (B) Bottom Pull	
Chain Stay Angle	66~69 °	
Average Weight	154g (M)	144g (M)

Model No.	FDM05	FDM06
Rear Compatibility	7 / 6 / 5-Speed	6 / 5-Speed
Chainring Compatibility	Triple Friction	Double Friction
Top Gear Teeth	48T	48T
Top-Low Max. Capacity	20T	10T
Top-Middle Min. Capacity	10T	×
Clamp Diameter	(M) 31.8 / (S) 28.6mm	(S) 28.6mm
Cable Routing	(B) Bottom Pull	(B) Bottom Pull
Chain Stay Angle	66~69 °	66~69 °
Average Weight	148g	142g

Rear Derailleurs

Model No.	RDMZ LD	RDMZ MD	RDMX LD	RDMX MD	RDM97 LD	RDM91 LD
Cage Type	(L) Long	(M) Medium	(L) Long	(M) Medium	(L) Long	(L) Long
Mounting Type	(D) Direct		(D) Direct		(D) Direct	(D) Direct
Speeds	9-Speed		9-Speed		9-Speed	9-Speed
Max. Sprocket	34T		34T		34T	34T
Min. Sprocket	11T		11T		11T	11T
Rear Capacity	23T		23T		23T	23T
Max. Front Difference	22T	22T	22T	22T	22T	22T
Total Capacity	45T	35T	45T	35T	45T	45T
Outer Link	Forged Aluminum / Anodized / CNC		Forged Aluminum / Anodized / CNC		Aluminum	Steel
Inner Link	Aluminum Forged / Anodized		Aluminum Forged / Anodized		Steel	Steel
Bracket Body	Forged Aluminum / Anodized / CNC		Forged Aluminum / Anodized / CNC		Aluminum	Aluminum
Plate Body	Forged Aluminum / Anodized / CNC		Forged Aluminum / Anodized / CNC		Aluminum	Engineering Polymers
Outer Plate Cage	Carbon		Aluminum / Anodized / CNC		Steel	Steel
Inner Plate Cage	Aluminum / Anodized		Aluminum / Anodized		Steel	Steel
Guide Pulley	11T / 7075 Aluminum / Cartridge Bearing		11T / 7075 Aluminum / Cartridge Bearing		11T (Bushing)	11T (Bushing)
Tension Pulley	11T / 7075 Aluminum / Cartridge Bearing		11T / 7075 Aluminum / Cartridge Bearing		11T (Bushing)	11T (Bushing)
Bracket Bolt	7075 Aluminum / Gold Anodized		7075 Aluminum / Black Anodized		Steel	Steel
Cable Adjuster	×		×		Composite	Composite
Pin Bushing (Outer Link)	●		●		●	×
Pin Bushing (Inner Link)	●		●		×	×
Average Weight	245g	235g	250g	240g	335g	342g

Rear Derailleurs

Model No.	RDM57 LD	RDM41 LD	RDM37 LD	RDM37 LB	RDM37 SD	RDM37 SB	RDM36 SD	RDM36 SB
Cage Type	(L) Long	(L) Long	(L) Long	(L) Long	(S) Short	(S) Short	(S) Short	(S) Short
Mounting Type	(D) Direct	(D) Direct	(D) Direct	(B) Bracket	(D) Direct	(B) Bracket	(D) Direct	(B) Bracket
Speeds	8 / 7-Speed	8 / 7-Speed	7-Speed		7-Speed		6-Speed	
Max. Sprocket	34T	34T	30T		30T		30T	
Min. Sprocket	11T	11T	13T		13T		14T	
Rear Capacity	23T	23T	17T		17T		16T	
Max. Front Difference	20T	20T	20T		20T		20T	
Total Capacity	43T	43T	37T		37T		36T	
Outer Link	Steel	Steel	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Inner Link	Steel	Steel	Steel		Steel		Steel	
Bracket Body	Engineering Polymers	Engineering Polymers	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Plate Body	Engineering Polymers	Engineering Polymers	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Outer Plate Cage	Steel	Steel	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Inner Plate Cage	Steel	Steel	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Guide Pulley	11T(bushing)	11T(bushing)	11T		11T		11T	
Tension Pulley	11T(bushing)	13T(bushing)	11T		11T		11T	
Bracket Bolt	Steel	Steel	Steel		Steel		Steel	
Cable Adjuster	Composite	Composite	Composite		Composite		Composite	
Pin Bushing (Outer Link)	×	×	×		×		×	
Pin Bushing (Inner Link)	×	×	×		×		×	
Average Weight	354g	376g	230g	270g	225g	265g	225g	265g

Rear Derailleurs

Model No.	RDM2T LD	RDM2T LB	RDM2T SD	RDM2T SB	RDM15 LD	RDM15 LB	RDM15 SD	RDM15 SB	RDM10 LD	RDM10 LB
Cage Type	(L) Long	(L) Long	(S) Short	(S) Short	(L) Long	(L) Long	(S) Short	(S) Short	(L) Long	(L) Long
Mounting Type	(D) Direct	(B) Bracket	(D) Direct	(B) Bracket	(D) Direct	(B) Bracket	(D) Direct	(B) Bracket	(D) Direct	(B) Bracket
Speeds	7 / 6-Speed		7 / 6-Speed		5-Speed		5-Speed		Friction	
Max. Sprocket	28T		28T		28T		28T		28T	
Min. Sprocket	13T		13T		13T		14T		13T	
Rear Capacity	15T		15T		15T		14T		15T	
Max. Front Difference	20T		12T		20T		12T		20T	
Total Capacity	35T		27T		35T		26T		35T	
Outer Link	Steel		Steel		Steel		Steel		Steel	
Inner Link	Steel		Steel		Steel		Steel		Steel	
Bracket Body	Steel		Steel		Steel		Steel		Steel	
Plate Body	Steel		Steel		Steel		Steel		Steel	
Outer Plate Cage	Steel		Steel		Steel		Steel		Steel	
Inner Plate Cage	Steel		Steel		Steel		Steel		Steel	
Guide Pulley	10T		10T		10T		10T		10T	
Tension Pulley	10T		10T		10T		10T		10T	
Cable Adjuster	Composite		Composite		Composite		Composite		Steel	
Average Weight	265g	290g	251g	276g	265g	290g	253g	278g	265g	290g

Cassettes

Model No.	CSMZ0 TAW	CSMX0 TAW	CSMS0 TAW
Speeds	10-Speed		
Function	Fluid Drive Plus™		
Number of Teeth	11-36T	11-36T	11-36T
Gear Combination	11-13-15-17-19- -21-24-28-32-36	11-13-15-17-19- -21-24-28-32-36	11-13-15-17-19- -21-24-28-32-36
Spider Material	Aluminum		
Sprockets On Spider	5 Sprockets on 2 Spider Carriers		
Sprocket Material	Hi-Tensile Steel		
Sprocket Finish	(T) Titanium-Nitride	(O) Black Chrome / (M) Champagne	(M) Champagne
Light Weight Holes	●		
Spacer Material	Aluminum / Red Anodized		Composite
Lock Ring	Aluminum / Red Anodized		Steel / ED Black
Chain Compatibility	5.9mm		5.9mm
Average Weight	341g	341g	348g

Model No.	CSMX7 9AV	CSMX7 9AU	CSM99 9AW	CSM99 9BW	CSM98 9AW	CSM98 9BW
Speeds	9-Speed		9-Speed		9-Speed	
Function	Super Fluid Drive™		Super Fluid Drive™		Super Fluid Drive™	
Number of Teeth	11-34T	11-32T	11-36T	12-36T	11-36T	12-36T
Gear Combination	11-12-14-16- 18-21-24-28-34	11-12-14-16- 18-21-24-28-32	11-13-15-18- 21-24-28-32-36	12-14-16-18- 21-24-28-32-36	11-13-15-18- 21-24-28-32-36	12-14-16-18- 21-24-28-32-36
Spider Material	7075 Aluminum / Black Anodized		Aluminum / Black Anodized		X	
Sprockets On Spider	6 Sprockets on 3 Spider Carriers		3 Sprockets on 1 Spider Carriers		X	
Sprocket Material	Hi-Tensile Steel		Hi-Tensile Steel		Hi-Tensile Steel	
Sprocket Finish	(S) Sandblast Satin		(N) Nickel Plated		(N) Nickel Plated	
Light Weight Holes	●		●		●	
Spacer Material	Aluminum / Black Anodized		Engineering Polymers		Engineering Polymers	
Lock Ring	Aluminum / Black Anodized		Aluminum / Black Anodized		Steel	
Chain Compatibility	6.6mm		6.6mm		6.6mm	
Average Weight	287g	275g	390g	395g	436g	441g

Cassettes

Model No.	CSM96 9AV	CSM96 9AU	CSM91 9AV	CSM91 9AU	CSM90 9AV	CSM90 9AU
Speeds	9-Speed		9-Speed		9-Speed	
Function	Super Fluid Drive™		Super Fluid Drive™		Super Fluid Drive™	
Number of Teeth	11-34T	11-32T	11-34T	11-32T	11-34T	11-32T
Gear Combination	11-12-14-16- 18-21-24-28-34	11-12-14-16- 18-21-24-28-32	11-12-14-16- 18-21-24-28-34	11-12-14-16- 18-21-24-28-32	11-12-14-16- 18-21-24-28-34	11-12-14-16- 18-21-24-28-32
Sprocket Material	Steel		Steel		Steel	
Sprocket Finish	(N) Nickel Plated		(N) Nickel Plated		(U) Zinc / (B) Black	
Light Weight Holes	●		●		●	
Spacer Material	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Lock Ring	Steel / ED Black		Aluminum / Black Anodized		Steel	
Chain Compatibility	6.6mm		6.6mm		6.6mm	
Average Weight	358g	346g	350g	338g	358g	346g

Cassettes

Model No.	CSM66 8AV	CSM66 8AU	CSM66 8BV	CSM66 8BU	CSM55 8AV	CSM55 8AU
Speeds	8-Speed		8-Speed		8-Speed	
Function	Super Fluid Drive™		Super Fluid Drive™		Super Fluid Drive™	
Number of Teeth	11-34T	11-32T	12-34T	12-32T	11-34T	11-32T
Gear Combination	11-13-15-18- 21-24-28-34	11-13-15-18- 21-24-28-32	12-14-16-18- 21-24-28-34	12-14-16-18- 21-24-28-32	11-13-15-18- 21-24-28-34	11-13-15-18- 21-24-28-32
Sprocket Material	Hi-Tensile Steel		Hi-Tensile Steel		Steel	
Sprocket Finish	(N) Nickel Plated		(N) Nickel Plated		(U) Zinc / (B) Black	
Light Weight Holes	●		●		●	
Spacer Material	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Lock Ring	Steel / ED Black		Steel / ED Black		Steel	
Chain Compatibility	7.1~7.3mm		7.1~7.3mm		7.1~7.3mm	
Average Weight	346g	334g	346g	334g	346g	334g

Model No.	CSM63 7AS	CSM63 7BS	CSM40 7AV	CSM40 7AS
Speeds	7-Speed		7-Speed	
Function	Super Fluid Drive™		Super Fluid Drive™	
Number of Teeth	11-28T	12-28T	11-34T	11-28T
Gear Combination	11-13-15- 18-21-24-28	12-14-16- 18-21-24-28	11-13-15- 18-22-28-34	11-13-15- 18-21-24-28
Sprocket Material	Hi-Tensile Steel		Hi-Tensile Steel	
Sprocket Finish	(N) Nickel Plated		(U) Zinc / (B) Black	
Light Weight Holes	●		●	
Spacer Material	Engineering Polymers		Engineering Polymers	
Lock Ring	Steel / ED Black		Steel	
Chain Compatibility	7.1~7.3mm		7.1~7.3mm	
Average Weight	248g	258g	310g	248g

Freewheels [E-Bike]

Model No.	MFEZ1 TAW	MFEX9 9AU	MFE90 9CU	MFE60 8CU	MFE60 8CS
Speeds	10-Speed	9-Speed	9-Speed	8-Speed	8-Speed
Lock Ring Type	●	●	●	●	●
Function	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive Plus™
Number of Teeth	11-36T	11-32T	13-32T	13-32T	13-28T
Gear Combination	11-13-15-17-19- -21-24-28-32-36	11-12-14-16- -18-21-24-28-32	13-14-15-16- -18-21-24-28-32	13-15-17-19- -21-24-28-32	13-15-17-19- -21-23-25-28
Spider Material	Aluminum / Gold Anodized	Aluminum / Gold Anodized	×	×	
Sprockets On Spider	4	2	×	×	
Sprocket Finish	(C) Chrome Plated	(C) Chrome Plated	(C) Chrome Plated	(C) Chrome Plated	
Sprocket Material	Hi-Tensile Steel	Hi-Tensile Steel	Steel	Steel	
Light Weight Holes	●	●	●	●	
Spacer Material	Aluminum / Gold Anodized	Aluminum / Gold Anodized	Engineering Polymers	Engineering Polymers	
Chain Compatibility	5.9mm	6.6mm	6.6mm	7.1~7.3mm	7.1~7.3mm
Average Weight	653g	595g	570g	576g	574g

Freewheels

Model No.	MFM56 8CV	MFM4S 7CV	MFM30 7CS	MFM3S 7CS	MFM20 6DS
Speeds	8-Speed	7-Speed	7-Speed	7-Speed	6-Speed
Lock Ring Type	●	●	●	●	×
Function	Fluid Drive™	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive Plus™	Fluid Drive Plus™
Number of Teeth	13-34T	13-34T	13-28T	13-28T	14-28T
Gear Combination	13-15-17-19-21-24-28-34	13-15-17-19-21-24-34	13-15-17-19-21-24-28	13-15-17-19-21-24-28	14-16-18-21-24-28
Sprocket Finish	(U) Zinc + EDB	(U) Zinc + EDB	(C) Chrome Plated	(U) Zinc Plated	(U) Zinc Plated
Sprocket Material	Steel	Steel	Steel	Steel	Steel
Light Weight Holes	×	●	●	●	●
Spacer Material	Engineering Polymers				
Chain Compatibility	7.1~7.3mm	7.3mm	7.3mm	7.3mm	7.3~7.8mm
Average Weight	609g	504g	460g	460g	433g

Model No.	MFM2A 7DV	MFM2A 7DS	MFM2A 6DS	MFM2A 5DS	MFM05 7DS	MFM05 6DS	MFM05 5DS
Speeds	7-Speed	7-Speed	6-Speed	5-Speed	7-Speed	6-Speed	5-Speed
Lock Ring Type	●	●	●	●	×		
Function	Fluid Drive™	Fluid Drive™	Fluid Drive™	Fluid Drive™	Friction		
Number of Teeth	14-34T	14-28T	14-28T	14-28T	14-28T	14-28T	14-28T
Gear Combination	14-16-18-20-22-24-34	14-16-18-20-22-24-28	14-16-18-20-24-28	14-16-20-24-28	14-16-18-20-22-24-28	14-16-18-20-24-28	14-16-20-24-28
Sprocket Finish	(3) Zinc+EDB (2) Brown+EDB	(1) Zinc (2) Brown+EDB	(1) Zinc (2) Brown+EDB	(1) Zinc (2) Brown+EDB	(B) Black		
Sprocket Material	Steel				Steel		
Spacer Material	Engineering Polymers				Engineering Polymers		
Chain Compatibility	7.3mm	7.3mm	7.3~7.8mm	7.8mm	7.3mm	7.3~7.8mm	7.8mm
Average Weight	535g	495g	458g	416g	480g	468g	432g

Hubs

Model No.	HBMD7		HBMZ7		HBMX7	
	F	R9	F	R9	F	R9
Cassette Carrier Material	---	7075 Aluminum	---	7075 Aluminum	---	7075 Aluminum
Cassette Carrier System	---	3 Pawls	---	3 Pawls	---	3 Pawls
Hub Shell Material	6061 Aluminum		6061 Aluminum		6061 Aluminum	
Bearing	Cartridge (x2)	Cartridge (x5)	Cartridge (x2)	Cartridge (x4)	Cartridge (x2)	Cartridge (x4)
D-Dimension	---	41mm	---	41mm	---	41mm
Axle Diameter	20mm	12mm	9mm	10mm	9mm	10mm
Over Lock Dimension	110mm	150mm	100mm	135mm	100mm	135mm
Hub Axle Material	---	SCM435	7075 Aluminum		7075 Aluminum	
Hub Axle Length	148mm	150mm	110mm	145mm	110mm	145mm
Spoke Holes	32H		32H		32H	
Pitch Circle Diameter	58mm		R38.5mm / L58mm	R48mm / L58mm	R38.5mm / L58mm	R45.5mm / L58mm
Flange Width	57.4mm	75.1mm	56.3mm	57.4mm	56.3mm	57.4mm
Center to Flange	Right	33.0mm	30.8mm	33.4mm	21.5mm	33.4mm
	Left	24.4mm	44.3mm	22.9mm	35.9mm	22.9mm
QR Lever Material	6061 Aluminum	6061 Aluminum	6061 Aluminum		6061 Aluminum	
QR Nut Material	6061 Aluminum	6061 Aluminum	6061 Aluminum		6061 Aluminum	
QR Axle Material	6061 / SCM435	SCM435	Titanium		SCM435	
QR Axle Length	148mm	166mm	112mm	149mm	112mm	149mm
Finish	Gold Anodized		Gold Anodized		Black Anodized	
Average Weight	387g (w/QR)	695g (w/QR)	198g (w/QR)	343g (w/QR)	207g (w/QR)	355g (w/QR)

Hubs

M Specifications

Model No.		HBM96		HBM63		HBM53	
		F	R9	F	R8	F	R8
Cassette Carrier Material		---	SCM435	---	SCM435	---	SCM435
Cassette Carrier System		---	3 Pawls	---	3 Pawls	---	3 Pawls
Hub Shell Material		6061 Aluminum		6061 Aluminum		6061 Aluminum	
Bearing		Precision Ground Loose Ball		Precision Ground Loose Ball		Loose Ball	Loose Ball
D-Dimension		---	41mm	---	41mm	---	41mm
Axle Diameter		9mm	10mm	9mm	10mm	9mm	10mm
Over Lock Dimension		100mm	135mm	100mm	135mm	100mm	135mm
Hub Axle Material		SCM435		SCM435		SCM435	
Hub Axle Length		108mm	145mm	108mm	145mm	108mm	145mm
Spoke Holes		32H		32H/36H		32H/36H	
Pitch Circle Diameter		58mm	58mm	40mm	45.5mm	38.5mm	45.5mm
Flange Width		58.6mm	58mm	63.4mm	58mm	72mm	58mm
Center to Flange	Right	34.3mm	21.1mm	31.7mm	21.1mm	36mm	21.5mm
	Left	24.3mm	36.9mm	31.7mm	36.9mm	36mm	36.5mm
QR Lever Material		6061 Aluminum		6061 Aluminum		6061 Aluminum	
QR Axle Material		SCM435		SCM435		SCM435	
QR Axle Length		112mm	149mm	112mm	149mm	112mm	149mm
Finish		Black Anodized		Black Anodized		Natural Alloy	
Average Weight		304g (w/QR)	492g (w/QR)	250.5g (w/QR)	457g (w/QR)	220g (w/QR)	440g (w/QR)

Model No.		HBM45 (Q)			HBM45 (A)	
		F	R7	R8	F	R7
Cassette / Freewheel		---	Freewheel		---	Freewheel
Hub Shell Material		6061 Aluminum			6061 Aluminum	
Bearing		Loose Ball			Loose Ball	
D-Dimension		---	38mm	41mm	---	38mm
Axle Diameter		9mm	10mm		3/8"	
Over Lock Dimension		100mm	135mm		100mm	135mm
Hub Axle Material		S45C			S45C	
Hub Axle Length		108mm	145mm		108mm	145mm
Spoke Holes		36H			36H	
Pitch Circle Diameter		38mm	45.5mm		38mm	45.5mm
Flange Width		72mm	57mm		72mm	57mm
Center to Flange	Right	36mm	23.5mm	23.5mm	36mm	23.5mm
	Left	36mm	33.5mm	33.5mm	36mm	33.5mm
QR Lever Material		6061 Aluminum			N/A (Nuttet)	
QR Axle Material		SCM435				
QR Axle Length		112mm	149mm			
Finish		Natural Alloy			Natural Alloy	
Average Weight		208g (w/QR)	320g (w/QR)	326g (w/QR)	212g	317g

STR Shifters

Model No.		STRZ		STRX		STRS	
		RT(10)	L2	RT(10)	L2	RT(10)	L2
Speed	Rear	10-Speed	×	10-Speed	×	10-Speed	×
	Front	×	2-Speed	×	2-Speed	×	2-Speed
Max.Single-Stroke Shifts		3 (rear)	1 (front)	3 (rear)	1 (front)	3 (rear)	1 (front)
Brake Lever		Carbon Reinforced Forged Aluminum		Aluminum Forged / High-Polished Anodized		Aluminum Forged / High-Polished Anodized	
Shift Lever	Large Lever	Forged Aluminum		Forged Aluminum		Rubber Cushioned	
	Small Lever	Engineering Polymers		Engineering Polymers		Engineering Polymers	
Cable Type		Slick-Stainless + Teflon® Coating*		Slick-Stainless + Teflon® Coating*		Slick-Stainless + Teflon® Coating*	
Cable Length		2,100mm	1,650mm	2,100mm	1,650mm	2,100mm	1,650mm
Casing Compatibility		SP		SP		SP	
Bracket		Engineering Polymers		Engineering Polymers		Engineering Polymers	
Handle Bar Diameter		23.8~24.2mm		23.8~24.2mm		23.8~24.2mm	
Average Weight		383g (Pair)		387g (Pair)		418g (Pair)	

* Teflon® is a registered trademark and brand name owned by DuPont.

Model No.		STR90			STR80		
		R9	L2	L3	R8	L2	L3
Speed	Rear	9-Speed	×	×	8-Speed	×	×
	Front	×	2-Speed	3-Speed	×	2-Speed	3-Speed
Max.Single-Stroke Shifts		3 (rear)	1 (front)	1 (front)	3 (rear)	1 (front)	1 (front)
Brake Lever		Aluminum Forged / High-Polished Anodized			Aluminum Forged / High-Polished Anodized		
Shift Lever	Large Lever	Rubber Cushioned			Rubber Cushioned		
	Small Lever	Engineering Polymers			Engineering Polymers		
Cable Type		Slick-Stainless			Slick-Stainless		
Cable Length		2,100mm	1,650mm	1,650mm	2,100mm	1,650mm	1,650mm
Casing Compatibility		SP			SP		
Bracket		Engineering Polymers			Engineering Polymers		
Handle Bar Diameter		23.8~24.2mm			23.8~24.2mm		
Average Weight		418g (Pair)			418g (Pair)		

Thumb Shifters

Model No.		SLR96		SLR91		SLR80		
		R9	LF	R9	LF	R8	LF	8F
Speed	Rear	9-Speed	×	9-Speed	×	8-Speed	×	8-Speed
	Front	×	Friction (3 / 2)	×	Friction (3 / 2)	×	Friction (3 / 2)	Friction (3 / 2)
Mounting		(B) Bar End		(B) Brazed On Type 28.6mm / (C) Brazed On Type 44mm / (F) Brazed On Type 50mm		(B) Brazed On Type 28.6mm / (C) Brazed On Type 44mm / (F) Brazed On Type 50mm		(H) 22.2mm Clamp / (G) Handlebar Stem 25.4mm Clamp / (D) Down Tube 28.6mm Clamp
Shift Lever		Aluminum / High-Polished		Aluminum / High-Polished		Aluminum / High-Polished		Aluminum / High-Polished
Cable Type		Slick-Galvanized		Slick-Galvanized		Slick-Galvanized		Slick-Galvanized
Cable Length		2,400mm	1,450mm	1,950mm	1,450mm	1,950mm	1,450mm	R:1,950mm / L:1,450mm
Casing Compatibility		SP	SP	SP	2SP & ↑	SP	2SP & ↑	R: SP / L: 2SP & ↑
Average Weight		105g	105g	50g	50g	50g	50g	(D) 107g / (G) (H) 122g

Model No.		SLR30				
		R7	R6	LF	7F	6F
Speed	Rear	7-Speed	6-Speed	×	7-Speed	6-Speed
	Front	×		Friction (3 / 2)	Friction (3 / 2)	
Mounting		(B) Brazed On Type 28.6mm / (C) Brazed On Type 44mm			(D) Down Tube 28.6mm Clamp / (G) Handlebar Stem 25.4mm Clamp / (H) 22.2mm Clamp	
Shift Lever		Aluminum			Aluminum	
Cable Type		Slick-Galvanized			Slick-Galvanized	
Cable Length		1,950mm		1,450mm	R:1,950mm / L:1,450mm	
Casing Compatibility		SP	2SP & ↑	2SP & ↑	R: SP / L: 2SP & ↑	2SP & ↑
Average Weight		50g	50g	50g	(D) 107g / (G) (H) 122g	

Model No.		SLR03	
		FF	RF
Speed	Rear	Friction (8 / 7 / 6)	
	Front	Friction (3 / 2)	×
Mounting		(D) Down Tube 28.6mm Clamp (H) Handlebar Stem 22.2mm Clamp	
Shift Lever		Aluminum	
Cable Type		Galvanized	
Cable Length		R:1,950mm / L:1,450mm	
Casing Compatibility		2SP & ↑	
Average Weight		(D) 78g / (H) 70g	(D) 45g / (H) 37g

Front Cranksets

Model No.		FCRZ7 (D2)	FCRZ6 (D2)	FCRZ3 (D2)	FCRZ1 (D2)	FCRX7 (D1)	FCRX6 (D1)	FCRX3 (D1)	FCRX1 (D1)	FCSR6 (S1)	FCSR1 (S1)
Compatibility		10-Speed				10-Speed				10-Speed	
Function		Super Fluid Drive™				Super Fluid Drive™				Super Fluid Drive™	
Crank Arm Spline Type		Integrated ISIS External BB (D1)				Integrated ISIS External BB (D1)				Integrated ISIS External BB (S1)	
Number of Teeth		50-36T	50-34T	52-39T	53-39T	50-36T	50-34T	53-39T	52-39T	50-34T	53-39T
Outer Chaining		7075 Aluminum / Black Anodized / CNC				7075 Aluminum / Black Anodized / CNC				Aluminum / Anodized / CNC	
Inner Chaining		7075 Aluminum / Black Anodized / CNC				7075 Aluminum / Black Anodized / CNC				Aluminum / Anodized	
Removable Chainrings		●				●				●	
Crank Arms		Carbon				6061 Aluminum Forged / High-Polished Anodized				6061 Aluminum Forged / High-Polished Anodized	
Crank Arm Length		(L) 175mm / (M) 172.5mm / (O) 170mm				(M) 172.5mm				(M) 172.5mm	
Axle Material		Titanium				Chromoly				Chromoly	
Axle Diameter		Ø 24mm				Ø 24mm				Ø 24mm	
Axle Bolt		7075 Aluminum				7075 Aluminum				7075 Aluminum	
Chainring Bolts & Nuts		7075 Aluminum / Anodized				7075 Aluminum / Silver Anodized				7075 Aluminum / Silver Anodized	
Bolt Circle Diameter		110mm		130mm		110mm		130mm		110mm	130mm
Bottom Bracket (Included)	Model	BBRZ (D1)*				BBRX (D1)*				BBRS (S1)*	
	Adapter	Aluminum / Anodized				Aluminum / Silver Anodized				Aluminum / Silver Anodized	
	Shell Width	BSA 68mm				BSA 68mm				BSA 68mm	
	Chain Line	43.5mm				43.5mm				43.5mm	
	Weight	112g				125g				125g	
Crank(R) Weight		430g	423g	435g	435g	566g	559g	579g	571g	559g	564g
Crank(L) Weight		197g	197g	197g	197g	260g	260g	260g	260g	260g	260g
Total Average Weight		739g	732g	744g	752g	951g	944g	964g	956g	944g	949g

* Not compatible with Shimano Road

Front Cranksets

Model No.		FCR9F	FCR9A	FCR96	FCR91
Compatibility		9-Speed		9-Speed	
Function		Super Fluid Drive™		Super Fluid Drive™	
Crank Arm Spline Type		Square Taper		Square Taper	
Number of Teeth		50-34T	53-39T	50-34T	53-39T
Outer Chainring		Aluminum / Anodized / CNC		Steel	
Inner Chainring		Aluminum / Anodized		Steel	
Removable Chainrings		●		●	
Crank Arms		6061 Aluminum Forged / High-Polished Anodized			
Crank Arm Length		172.5 / 170mm			
Chainring Bolts & Nuts		SCM435 Chromoly		SCM435 Chromoly	
Bolt Circle Diameter		110mm	130mm	110mm	130mm
Bottom Bracket (Optional)	Model	BBS18	BBS18	BBS15	BBS15
	Shell Width	68mm (S)	68mm (S)	68mm (S)	68mm (S)
	Spindle Length	103mm (A)	111mm (F)	103mm (A)	111mm (F)
	Chain Line	43.5mm	43.5mm	43.5mm	43.5mm
Average Weight		600g	697g	831g	889g

Model No.	FCR87	FCR86	FCR83	FCR81	FCR33	FCR31
Chain Compatibility	8-Speed		8-Speed		7-Speed	
Function	Super Fluid Drive™		Super Fluid Drive™		Friction	
Crank Arm Spline Type	Square Taper		Square Taper		Square Taper	
Number of Teeth	52-42-30T	50-34T	52-42T	53-39T	52-42T	53-39T
Outer Chainring	Steel		Steel		Steel	
Inner Chainring	Steel		Steel		Steel	
Removable Chainrings	●		●		●	
Crank Arms	6061 Aluminum Forged / High-Polished Anodized		6061 Aluminum Forged / High-Polished Anodized		6061 Aluminum Forged / High-Polished	
Crank Arm Length	170mm		170mm		170mm	
Chainring Bolts & Nuts	SCM435 Chromoly		SCM435 Chromoly		SCM435 Chromoly	
Bolt Circle Diameter	130 / 74mm	110mm	130mm		130mm	
Bottom Bracket (Optional)	Model	BBS15	BBS15	BBS15	BBS15	BBS15
	Shell Width	68mm (S)	68mm (S)	68mm (S)	68mm (S)	68mm (S)
	Spindle Length	111mm (F)	103mm (A)	107mm (B)	107mm (B)	107mm (B)
	Chain Line	45mm	43.5mm	43.5mm	43.5mm	43.5mm
Average Weight	1,090g	831g	899g	906g	894g	901g

Front Derailleurs

Model No.	FDRZ	FDRX	FDRS	FDR99	FDR90	FDR87	FDR80
Rear Compatibility	10-Speed	10-Speed	10-Speed	9-Speed	9-Speed	8-Speed	8-Speed
Chainring Compatibility	Double	Double	Double	Triple	Double	Triple	Double
Top Gear Teeth	56~50 T	56~50 T	56~50 T	50T	56~50T	52T	56~50T
Capacity	16T	16T	16T	20T	16T	22T	16T
Mounting	Brazed on	Brazed on	Band / (B) Brazed on	Band / (B) Brazed on	Band / (B) Brazed on	Band / (B) Brazed on	Band / (B) Brazed on
Band Diameter	×	×	(L) 34.9 / (M) 31.8mm*	(L) 34.9 / (M) 31.8mm*	(L) 34.9 / (M) 31.8mm*	(M)31.8 / (S) 28.6mm*	(M)31.8 / (S) 28.6mm*
Cable Routing	(B) Bottom Pull	(B) Bottom Pull	(B) Bottom Pull	(B) Bottom Pull	(B) Bottom Pull	(B) Bottom Pull	(B) Bottom Pull
Band & Brazed on	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged
Outer Link	Aluminum Forged	Aluminum Forged / CNC	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged
Inner Link	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged	Aluminum Forged
Chain Guide	Carbon Reinforced Steel	Steel / Chrome Plated	Steel / Chrome Plated	Steel / Chrome Plated	Steel / Chrome Plated	Steel / Chrome Plated	Steel / Chrome Plated
Applicable Chainline	43.5mm	43.5mm	43.5mm	45mm	43.5mm	45mm	43.5mm
Chain Stay Angle	61~66 °	61~66 °	61~66 °	63~66 °	61~66 °	63~66 °	61~66 °
Average Weight	102g	99g	111g / 99g (B)	114g / 99g (B)	111g / 99g (B)	115g / 100g (B)	114g / 99g (B)

* With multi clamp band inserts

Model No.	FDR31
Rear Compatibility	7 / 6 / 5-Speed
Chainring Compatibility	Double Friction
Top Gear Teeth	53 T
Capacity	14 T
Mounting	Band
Band Diameter	(M) 31.8 / (S)28.6mm
Cable Routing	(B) Bottom Pull
Band & Brazed on	Steel
Outer Link	Steel
Inner Link	Steel
Chain Guide	Steel
Applicable Chainline	45mm
Chain Stay Angle	63~66 °
Average Weight	150g

Rear Derailleurs

Model No.	RDRZ2 SD	RDRX2 SD	RDRS1 SD	RDR91 SD	RDR91 LD
Cage Type	(S) Short	(S) Short	(S) Short	(S) Short	(L) Long
Mounting Type	(D) Direct	(D) Direct	(D) Direct	(D) Direct	(D) Direct
Speeds	10 / 9-Speed	10 / 9-Speed	10 / 9-Speed	9-Speed	
Max. Sprocket	28T	28T	28T	28T	28T
Min. Sprocket	11T	11T	11T	11T	11T
Rear Capacity	17T	17T	17T	17T	17T
Max. Front Difference	16T	16T	16T	16T	22T
Total Capacity	33T	33T	33T	33T	39T
Outer Link	Carbon Reinforced Cold Forged Aluminum	Cold Forged Aluminum / High-Polished Anodized	Aluminum / High-Polished	Aluminum / High-Polished	
Inner Link	Cold Forged Aluminum / High-Polished Anodized	Cold Forged Aluminum / High-Polished Anodized	Steel	Steel	
Bracket Body	Cold Forged Aluminum / High-Polished Anodized	Cold Forged Aluminum / High-Polished Anodized	Aluminum	Aluminum	
Plate Body	Cold Forged Aluminum / High-Polished Anodized	Cold Forged Aluminum / High-Polished Anodized	Composite	Composite	
Outer Plate Cage	Carbon	Aluminum / Anodized / CNC	Aluminum / Anodized	Steel	
Inner Plate Cage	Aluminum	Aluminum	Aluminum	Steel	
Guide Pulley	11T / 7075 / Ceramic Sealed Cart. Bearing	11T / 7075 / Sealed Cart. Bearing	11T / Sealed Cart. Bearing	11T	
Tension Pulley	11T / 7075 / Ceramic Sealed Cart. Bearing	11T / 7075 / Sealed Cart. Bearing	11T / Sealed Cart. Bearing	11T	
Bracket Bolt	7075 Aluminum	7075 Aluminum / Black Anodized	7075 Aluminum / Anodized	Steel	
Cable Adjuster	Carbon	Composite	Composite	Composite	
Pin Bushings (Outer Link)	●	●	×	×	
Pin Bushings (Inner Link)	●	●	×	×	
Average Weight	202g	211g	212g	257g	279g

Rear Derailleurs

Model No.	RDR81 SD	RDR81 LD	RDR37 SD
Cage Type	(S) Short	(L) Long	(S) Short
Mounting Type	(D) Direct	(D) Direct	(D) Direct
Speeds	8-Speed	8-Speed	7 & 6-Speed
Max. Sprocket	28T	28T	28T
Min. Sprocket	11T	11T	13T
Rear Capacity	17T	17T	15T
Max. Front Diff.	16T	22T	14T
Total Capacity	33T	39T	31T
Outer Link	Aluminum	Aluminum	Steel
Inner Link	Steel	Steel	Steel
Bracket Body	Aluminum	Aluminum	Aluminum
Plate Body	Composite	Composite	Composite
Outer Plate Cage	Steel	Steel	Steel
Inner Plate Cage	Steel	Steel	Steel
Bracket Bolt	Steel	Steel	Steel
Guide Pulley	11T	11T	11T
Tension Pulley	11T	11T	11T
Cable Adjuster	Composite	Composite	Composite
Link Pin Bushings	×	×	×
Average Weight	257g	279g	282g

Cassettes

Model No.	CSRZ1 EAS	CSRZ1 EAU	CSRX1 EAS	CSRX1 EAU
Speeds	11-Speed	11-Speed	11-Speed	11-Speed
Function	Super Fluid Drive™	Super Fluid Drive™	Super Fluid Drive™	Super Fluid Drive™
Number of Teeth	11-28T	11-32T	11-28T	11-32T
Gear Combination	11-12-13-14-15-17-19-21-23-25-28	11-12-13-14-15-17-19-21-24-28-32	11-12-13-14-15-17-19-21-23-25-28	11-12-13-14-15-17-19-21-24-28-32
Spider Material	Aluminum / Red Anodized		Aluminum / Red Anodized	
Sprockets On Spider	3 Sprockets on 1 Spider Carrier		3 Sprockets on 1 Spider Carrier	
Sprocket Material	Hi-Tensile Steel		Hi-Tensile Steel	
Sprocket Finish	(T) Titanium-Nitride		(M) Champagne / (O) Black Chrome	
Light Weight Holes	●		●	
Spacer Material	Aluminum / Red Anodized		Aluminum / Red Anodized	
Lock Ring	6061 Aluminum / Red Anodized		6061 Aluminum / Red Anodized	
Chain Compatibility	5.6mm		5.6mm	
Average Weight	278g	290g	278g	290g

R Specifications

Cassettes

Model No.	CSRX TAQ	CSRX TAS	CSRX TAU	CSRX TBS	CSRX TBU
Speeds	10-Speed			10-Speed	10-Speed
Function	Super Fluid Drive™			Super Fluid Drive™	Super Fluid Drive™
Number of Teeth	11-25T	11-28T	11-32T	12-28T	12-32T
Gear Combination	11-12-13-14-15-17-19-21-23-25	11-12-13-14-15-17-19-21-24-28	11-12-13-15-17-19-21-24-28-32	12-13-14-15-17-19-21-23-25-28	12-13-14-15-17-19-21-24-28-32
Spider Material	Aluminum / Red Anodized			Aluminum / Red Anodized	
Sprockets On Spider	3 Sprockets on 1 Spider Carrier			3 Sprockets on 1 Spider Carrier	
Sprocket Material	Hi-Tensile Steel			Hi-Tensile Steel	
Sprocket Finish	(M) Champagne / (B) Black Chrome			(M) Champagne / (B) Black Chrome	
Light Weight Holes	●			●	
Spacer Material	Aluminum / Red Anodized			Aluminum / Red Anodized	
Lock Ring	6061 Aluminum / Red Anodized			6061 Aluminum / Red Anodized	
Chain Compatibility	5.9mm			5.9mm	
Average Weight	236g	245g	304g	269g	304g

Model No.	CSRS TAQ	CSRS TAS	CSRS TAU	CSRS TBS	CSRS TBU
Speeds	10-Speed			10-Speed	
Function	Super Fluid Drive™			Super Fluid Drive™	
Number of Teeth	11-25T	11-28T	11-32T	12-28T	12-28T
Gear Combination	11-12-13-14-15-17-19-21-23-25	11-12-13-14-15-17-19-21-24-28	11-12-13-15-17-19-21-24-28-32	12-13-14-15-17-19-21-23-25-28	12-13-14-15-17-19-21-24-28-32
Spider Material	Aluminum / Black Anodized			Aluminum / Black Anodized	
Sprockets On Spider	3 Sprockets on 1 Spider Carrier			3 Sprockets on 1 Spider Carrier	
Sprocket Material	Hi-Tensile Steel			Hi-Tensile Steel	
Sprocket Finish	(M) Champagne			(M) Champagne	
Light Weight Holes	●			●	
Spacer Material	Engineering Polymers			Engineering Polymers	
Lock Ring	Steel / ED Black			Steel / ED Black	
Chain Compatibility	5.9mm			5.9mm	
Average Weight	242g	250g	309g	274g	309g

Cassettes

R Specifications

Model No.	CSR91 9AQ	CSR91 9AS	CSR91 9BQ
Speeds	9-Speed		
Function	Super Fluid Drive™		
Number of Teeth	11-25T	11-28T	12-25T
Gear Combination	11-12-13-15-17-19-21-23-25	11-12-13-14-16-18-21-24-28	12-13-14-15-17-19-21-23-25
Sprocket Material	Hi-Tensile Steel		
Sprocket Finish	(N) Nickel Plated		
Light Weight Holes	●		
Spacer Material	Engineering Polymers		
Lock Ring	Aluminum / Black Anodized		
Chain Compatibility	6.6mm		
Average Weight	273g	280g	290g

Model No.	CSR86 8AO	CSR86 8AS	CSR86 8BQ
Speeds	8-Speed		
Function	Super Fluid Drive™		
Number of Teeth	11-23T	11-28T	12-25T
Gear Combination	11-12-13-15-17-19-21-23	11-12-14-16-18-21-24-28	12-13-15-17-19-21-23-25
Sprocket Material	Hi-Tensile Steel		
Sprocket Finish	(N) Nickel Plated		
Light Weight Holes	●		
Spacer Material	Engineering Polymers		
Lock Ring	Steel		
Chain Compatibility	7.1~7.3mm		
Average Weight	265g	235g	281g

Model No.	CSR63 7AP	CSR63 7BP
Speeds	7-Speed	
Function	Super Fluid Drive™	
Number of Teeth	11-24T	12-24T
Gear Combination	11-12-14-16-18-21-24	12-13-14-16-18-21-24
Sprocket Material	Hi-Tensile Steel	
Sprocket Finish	(N) Nickel Plated	
Light Weight Holes	●	
Spacer Material	Engineering Polymers	
Lock Ring	Steel	
Chain Compatibility	7.1~7.3mm	
Average Weight	190g	208g

R Specifications

Freewheels

Model No.	MFR30 7CQ	MFR2A 6DP
Speeds	7-Speed	6-Speed
Function	Fluid Drive™	Fluid Drive™
Lockring Type	●	●
Number of Teeth	13-25T	14-24T
Gear Combination	13-15-17-19-21-23-25	14-16-18-20-22-24
Sprocket Finish	(C) Chrome	(1) Zinc+EDB
Sprocket Material	Steel	Steel
Spacer Material	Engineering Polymers	Engineering Polymers
Chain Compatibility	7.3mm	7.3~7.8mm
Average Weight	440g	393g

Brake Levers

Model No.	BLR31	BLR03	BLR02
Return Spring	●	×	×
Bar Diameter	22.2~23.8mm	22.2~23.8mm	22.2~23.8mm
Lever Material	Forged Aluminum	Forged Aluminum	Forged Aluminum
Bracket Material	Nylon Composite	Forged Aluminum	Forged Aluminum
Cover Material	Rubber	×	×
Finish	Anodized	Anodized	Anodized
Average Weight	248g (Pair)	270g (Pair)	164g (Pair)

Brake Calipers

Model No.	BCRZ3	BCRZ2	BCRX3	BCRX2
Type	Dual-Pivot Device	Dual-Pivot Device	Dual-Pivot Device	Dual-Pivot Device
Reach	39~49mm	39~49mm	39~49mm	39~49mm
Quick Release	● (Index)	● (Index)	● (Index)	● (Index)
Convex Washers	●	●	●	●
Spring Adjustment	●	●	●	●
Arm Material	6061 Aluminum CNC		6061 Aluminum CNC	
Adjuster Material	6061 Aluminum CNC		6061 Aluminum CNC	
QR Material	6061 Aluminum CNC		6061 Aluminum CNC	
Mounting Bolt	Titanium		Chromoly	
Pivot Bolt	Titanium		Chromoly	
Other Bolts	Titanium		Chromoly	
Misc Screws	Stainless Steel		Stainless Steel	
Pad	SwissStop® Yellow King™	SwissStop® GHPII™	SwissStop® Yellow King™	SwissStop® GHPII™
Pad Type	Adjustable Angle Cartridge		Adjustable Angle Cartridge	
Rim Compatibility	Carbon Rim	Aluminum Rim	Carbon Rim	Aluminum Rim
Finish	Anodized		Anodized	
Average Weight	141g (Wheel)	141g (Wheel)	163g (Wheel)	163g (Wheel)

Brake Calipers

Model No.	BCRS	BCR91	BCR90	BCR81	BCR80	BCR30
Type	Dual-Pivot Device	Dual-Pivot Device	Dual-Pivot Device	Dual-Pivot Device	Dual-Pivot Device	Dual-Pivot Device
Reach	39~49mm	39~49mm	39~49mm	39~49mm	39~49mm	39~49mm
Quick Release	● (Index)	● (Index)	● (Index)	● (Index)	● (Index)	×
Convex Washers	●	×	×	×	×	×
Spring Adjustment	●	●	●	●	●	●
Arm Material	Forged Aluminum	Aluminum	Forged Aluminum	Aluminum	Forged Aluminum	Forged Aluminum
Adjuster Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
QR Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	×
Mounting Bolt	Chromoly	Chromoly	Chromoly	Chromoly	Chromoly	Chromoly
Pivot Bolt	Chromoly	Chromoly	Chromoly	Chromoly	Chromoly	Chromoly
Other Bolts	Chromoly	Chromoly	Chromoly	Chromoly	Chromoly	Chromoly
Pad	BSR90	BSR90	BSR90	BSR80	BSR80	BSR80
Pad Type	Adj. Angle Cartridge	Cartridge Type	Cartridge Type	Normal Pad Type	Normal Pad Type	Normal Pad Type
Rim Compatibility	Aluminum Rim	Aluminum Rim	Aluminum Rim	Aluminum Rim	Aluminum Rim	Aluminum Rim
Finish	High-Polish Anodized	ED Black	High-Polish Anodized	ED Black	High-Polished Anodized	High-Polish Anodized
Average Weight	184g (Wheel)	175g (Wheel)	184g (Wheel)	190g (Wheel)	181g (Wheel)	176g (Wheel)

Bottom Brackets

Model No.		BBI40	BBI30	BBI20	BBI10
Type		ISIS	ISIS	ISIS	ISIS
Material	Axle	SCM435 (Hollow)	SCM435 (Hollow)	SCM435 (Hollow)	SCM435 (Hollow)
	Cups	Aluminum w/Nylok	Aluminum w/Nylok	Aluminum w/Nylok	Steel
	Sleeve	Aluminum	Engineering Polymers	Aluminum (Cylindrical)	Steel (Cylindrical)
	Stopper	Steel	Alloy	SCM415	SCM415
Bearing		Sealed Cartridge (x4)	Sealed Cartridge (x2)	Sealed Cartridge (x2)	Sealed Cartridge (x2)
Cup Thread		(B) BSA: BC1.37x24T	(B) BSA: BC1.37x24T / (M) M36x24T**	(B) BSA: BC1.37x24T / (M) M36x24T**	(B) BSA: BC1.37x24T / (M) M36x24T**
Shell Width		(S) 68 / (L) 73mm	(S) 68 / (L) 73mm	(S) 68 / (L) 73mm	(S) 68 / (L) 73mm
Spindle Length		(C) 108* / (G) 113 / (J) 118mm	(C) 108* / (G) 113 / (J) 118mm	(C) 108* / (G) 113 / (J) 118mm	(C) 108* / (G) 113 / (J) 118mm
Axle Thread		M12 x P1.0	M15 x P1.0	M15 x P1.0	M15 x P1.0
Axle Bolt		Optional: BAI40, BAI42	Optional: BAI30 / BAI20 / BAI10	Optional: BAI30 / BAI20 / BAI10	Optional: BAI30 / BAI20 / BAI10
Finish		(B) Black	(B) Black w/ Silver Alloy Cup	(S) Silver Alloy	(B) Black
Average Weight		366g (68/L113mm)	154g (68/L113mm)	236g (68/L113mm)	228g (68/L113mm)

* Only shell width 68mm

** Italian-Cup with All RH Thread

Model No.		BBS18	BBS15	BBS08	BBS05
Type		Square Taper	Square Taper	Square Taper	Square Taper
Material	Axle	Steel	Steel	Steel	Steel
	Cups	Aluminum	Steel	Engineering Polymers	Steel (with Waterproof Seal)
	Sleeve	Aluminum (Cylindrical)	Steel (Cylindrical)	Steel (Cylindrical)	Engineering Polymers
	Stopper	Engineering Polymers	Engineering Polymers	Engineering Polymers	×
Bearing		Sealed Cartridge (x2)	Sealed Cartridge (x2)	Sealed Cartridge (x2)	Ball Cage
Cup Thread		(B) BSA: BC1.37x24T / (M) M36x24T**	(B) BSA: BC1.37x24T / (M) M36x24T**	(B) BSA: BC1.37x24T / (5) 35mm / (8) 38mm / (4) 40mm	(B) BSA: BC1.37x24T / (M) M36x24T**
Shell Width		(S) 68 / (M) 70 / (L) 73mm	(S) 68 / (M) 70 / (L) 73mm	(S) 68 / (M) 70 / (L) 73mm	(S) 68 / (M) 70mm
Spindle Length		(A) 103* / (B) 107 / (F) 111 / (G) 113 / (5) 115 / (H) 116 / (J) 118 / (K) 119 / (N) 122 / (U) 127 / (X) 131mm	(A) 103* / (B) 107 / (F) 111 / (G) 113 / (5) 115 / (H) 116 / (J) 118 / (K) 119 / (N) 122 / (U) 127 / (X) 131mm	(A) 103* / (B) 107 / (F) 111 / (G) 113 / (5) 115 / (H) 116 / (J) 118 / (K) 119 / (N) 122 / (U) 127 / (X) 131mm	(I) 117.5 / (Q) 124mm
Axle Thread		M8 x P1.0	M8 x P1.0	M8 x P1.0	M8 x P1.0
Axle Bolt		Standard: BAS05 / Optional: BAS15	Standard: BAS05 / Optional: BAS15	Standard: BAS05 / Optional: BAS15	Standard: BAS05 / Optional: BAS15
Finish		(S) Silver / (B) Black	(B) Black w/ Gray Cups	(B) Black	(B) Black
Average Weight		260g (68/L113.5mm)	338g (68/L113.5mm)	280g (68/L113.5mm)	360g (68/L120mm)

* Only shell width 68mm.

** Italian-Cup with All RH Thread.

Specifications

Bottom Brackets

Model No.		BBT08
Type		Cottered
Material	Axle	Steel
	Cups	Engineering Polymers
	Sleeve	Steel (Cylindrical)
	Stopper	Engineering Polymers
Bearing		Seal Cartridge (x2)
Cup Thread		(B) BSA: BC1.37x24T / (5) 35mm / (8) 38mm / (4) 40mm
Shell Width		(S) 68
Spindle Length		(6) 136
Finish		(B) Black
Average Weight		280g (68/L136mm)

Bottom Brackets

Model No.		BBMZ (D1)	BBMZ (D0)**	BBMX (D1)	BBMX (D0)**
Type		Integrated BB for FCMZ (D1)	Integrated BB for FCMZ (D0)	Integrated BB for FCMX (D1)	Integrated BB for FCMX (D0)
Shimano Compatible		×	● (MTB)	×	● (MTB)
Material	Cups	Aluminum	Aluminum	Aluminum	Aluminum
	Sleeve	Clear Composite	Black Composite	Clear Composite	Black Composite
	Spacers	Composite	Composite	Composite	Composite
Bearing		Oversized Sealed Cartridge (x2)	Sealed Cartridge (x2)	Oversized Sealed Cartridge (x2)	Sealed Cartridge (x2)
Cup Thread		BC 1.37 x 24T	BC 1.37 x 24T	BC 1.37 x 24T	BC 1.37 x 24T
Shell Width		68* / 73mm	68* / 73mm	68* / 73mm	68* / 73mm
Finish		(G) Gold Anodized	(G) Gold Anodized	(S) Silver Anodized	(S) Silver Anodized
Average Weight		127g	93g	127g	93g

* With spacers (Right: 2x / Left: 1x)

** Compatible with Shimano MTB

Model No.		BBM97 (S1)	BBM97 (S0)**
Type		Integrated BB for FCM99/97 (S1)	Integrated BB for FCM99/98/97 (S0)
Shimano Compatible		×	● (MTB)
Material	Cups	Aluminum	Aluminum
	Sleeve	Clear Composite	Black Composite
	Spacers	Composite	Composite
Bearing		Oversized Sealed Cartridge (x2)	Sealed Cartridge (x2)
Cup Thread		BC 1.37 x 24T	BC 1.37 x 24T
Shell Width		68* / 73mm	68* / 73mm
Finish		(S) Silver Anodized	(S) Silver Anodized
Average Weight		127g	93g

* With spacers (Right: 2x / Left: 1x)

** Compatible with Shimano MTB

Specifications

Bottom Brackets

Model No.		BBRZ (D1)	BBRZ (D0)	BBRX (D1)
Type		Integrated BB for FCRZ (D1/D2)	Integrated BB for FCRZ (D0)	Integrated BB for FCRX (D1)
Shimano Compatible		×	×	×
Material	Cups	Aluminum	Aluminum	Aluminum
	Sleeve	Clear Composite	Black Composite	Clear Composite
	Spacers	×	×	×
Bearing		Oversized Sealed Cartridge (x2)	Sealed Cartridge (x2)	Oversized Sealed Cartridge (x2)
Cup Thread		BC 1.37 x 24T	BC 1.37 x 24T	BC 1.37 x 24T
Shell Width		68mm	68mm	68mm
Finish		(S) Silver Anodized	(G) Gold Anodized	(S) Silver Anodized
Average Weight		112g	93g	125g

Model No.		BBRS (S1)	BBRS (S0)**
Type		Integrated BB for FCRS (S1)	Integrated BB for FCRS (S0)
Shimano Compatible		×	● (ROAD)
Material	Cups	Aluminum	Aluminum
	Sleeve	Clear Composite	Black Composite
	Spacers	×	×
Bearing		Oversized Sealed Cartridge (x2)	Sealed Cartridge (x2)
Cup Thread		BC 1.37 x 24T	BC 1.37 x 24T
Shell Width		68mm	68mm
Finish		(S) Silver Anodized	(S) Silver Anodized
Average Weight		125g	93g

** Compatible with Shimano Road

Chains

Model No.	CN11Z (T)	CN11X (S)
Speed	11-Speed	11-Speed
Pitch	1/2" x 11/128"	1/2" x 11/128"
Pin Material	Chromized SCM / Hollow Pin	Chromized SCM / Hollow Pin
Pin Power	≥ 200kgf	≥ 200kgf
Roller Material	Chromized SCM435	Chromized SCM435
Outer Plate Material	SCM435 + Teflon®* / Hollow Plate	SCM435 + Teflon®* / Hollow Plate
Inner Plate Material	SCM430 + Teflon®* / Hollow Plate	SCM430 + Teflon®* / Hollow Plate
Tensile Strength	≥ 820kgf	≥ 820kgf
Finish	(T) Titanium-Nitride	(S) Silver Ni-PO ₄
Connect End Pin	×	×
Connect Guide Pin	CNP11 (included)	CNP11 (included)
Connect Easy Link	CNU11 (optional)	CNU11 (optional)
Average Weight	245g (110 Links)	245g (110 Links)

* Teflon® is a registered trademark and brand name owned by DuPont.

Model No.	CNR1Z (T)	CNR1X (S)	CNR10 (S)	CN10S (S)	CN10S (1)
Speed	10-Speed	10-Speed	10-Speed	10-Speed	
Pitch	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	
Pin Material	Chromized SCM / Hollow Pin	Chromized SCM / Hollow Pin	Chromized SCM / Hollow Pin	Chromized SCM	
Pin Power	≥ 200kgf	≥ 200kgf	≥ 200kgf	≥ 200kgf	
Roller	Chromized SCM435	Chromized SCM435	Chromized SCM435	Chromized SCM435	
Outer Plate Material	SCM435 + Teflon®* / Hollow Plate	SCM435 + Teflon®* / Hollow Plate	SCM435	SCM435	
Inner Plate Material	SCM430 + Teflon®* / Hollow Plate	SCM430 + Teflon®* / Hollow Plate	SCM430	SCM430	
Tensile Strength	≥ 820kgf	≥ 820kgf	≥ 820kgf	≥ 820kgf	
Finish	(T) Titanium-Nitride w/ Ni-PO ₄	(S) Silver Ni-PO ₄	(S) Silver Ni	(S) Silver Ni	(1) Silver/Gray
Connect End Pin	×	×	×	×	
Connect Guide Pin	CNP10 (included)	CNP10 (included)	CNP10 (included)	CNP10 (included)	
Connect Easy Link	CNQ10 / CNU10 (optional)	CNQ10 / CNU10 (optional)	CNQ10 / CNU10 (optional)	CNQ10 / CNU10 (optional)	
Average Weight	244g (110 Links)	244g (110 Links)	246g (110 Links)	263g (110 Links)	

* Teflon® is a registered trademark and brand name owned by DuPont.

Specifications

Chains

Model No.	CNM9Z (T)	CNM9X (S)	CNM99 (S)	CNM99 (Y)	CNM94 (S)	CNM94 (1)	CNM94 (Y)
Speed	9-Speed	9-Speed	9-Speed	9-Speed	9-Speed	9-Speed	9-Speed
Pitch	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"
Pin Material	Chromized SCM / Hollow Pin	Chromized SCM / Hollow Pin	Chromized SCM / Hollow Pin	Chromized SCM / Hollow Pin	Chromized SCM	Chromized SCM	Chromized SCM
Pin Power	≥ 200kgf	≥ 200kgf	≥ 200kgf	≥ 200kgf	≥ 200kgf	≥ 200kgf	≥ 200kgf
Roller Material	SCM435	SCM435	SCM435	SCM435	SCM435	SCM435	SCM435
Outer Plate Material	SCM435 + Teflon®* / Hollow Plate	SCM435 + Teflon®* / Hollow Plate	SCM435	SCM435	SCM435	SCM435	SCM435
Inner Plate Material	SCM430 + Teflon®* / Hollow Plate	SCM430 + Teflon®* / Hollow Plate	SCM430	SCM430	SCM430	SCM430	SCM430
Tensile Strength	≥ 820kgf	≥ 820kgf	≥ 820kgf	≥ 820kgf	≥ 820kgf	≥ 820kgf	≥ 820kgf
Finish	(T) Titanium-Nitride	(S) Silver Ni-PO4	(S) Silver Ni	(Y) Gray	(S) Silver Ni	(1) Silver/Gray	(Y) Gray
Connect End Pin	×	×	×	×	×	×	×
Connect Guide Pin	CNP09 (included)	CNP09 (included)	CNP09 (included)	CNP09 (included)	CNP09 (optional)	CNP09 (optional)	CNP09 (optional)
Connect Easy Link	CNQ09 / CNU09 (optional)	CNQ09 / CNU09 (optional)	CNQ09 / CNU09 (optional)	CNQ09 / CNU09 (optional)	CNQ09 / CNU09 (optional)	CNQ09 / CNU09 (optional)	CNQ09 / CNU09 (optional)
Average Weight	254g (110 Links)	254g (110 Links)	256g (110 Links)	256g (110 Links)	273g (110 Links)	273g (110 Links)	273g (110 Links)

* Teflon® is a registered trademark and brand name owned by DuPont.

Model No.	CNM89 (S)	CNM84 (S)	CNM84 (Y)	CNM54 (Y)	CNM22 (B)
Speed	8-Speed	8-Speed	8-Speed	7 / 6-Speed	Friction
Pitch	1/2" x 3/32"	1/2" x 3/32"	1/2" x 3/32"	1/2" x 3/32"	1/2" x 3/32"
Pin Material	Chromized SCM / Hollow Pin	SCM420	SCM420	Steel	Steel
Pin Power	≥ 150kgf	≥ 150kgf	≥ 150kgf	≥ 150kgf	≥ 80kgf
Roller Material	Steel	Steel	Steel	Steel	Steel
Outer Plate Material	SAE1035	SAE1035	SAE1035	SAE1008	SAE1008
Inner Plate Material	SAE1035	SAE1035	SAE1035	SAE1008	SAE1008
Tensile Strength	≥ 820kgf	≥ 920kgf	≥ 920kgf	≥ 820kgf	≥ 820kgf
Finish	(S) Silver Ni	(S) Silver Ni	(Y) Gray	(Y) Gray	(B) Black
Connect End Pin	●	●	●	●	●
Connect Guide Pin	×	×	×	×	×
Connect Easy Link	CNQ87 / CNU87 (optional)	CNQ87 / CNU87 (optional)	CNQ87 / CNU87 (optional)	CNQ87 / CNU87 (optional)	×

Chains

Model No.	CNS22 (D)	CNS12 (S)	CNS10 (D)	CNS10 (B)
Speed	Single / Internal Gear Hub	Single / Internal Gear Hub	Single / Internal Gear Hub	
Pitch	1/2" x 3/32"	1/2" x 1/8"	1/2" x 1/8"	
Pin Material	Steel	Steel	Steel	
Pin Power	≥ 80kgf	≥ 150kgf	≥ 80kgf	
Roller Material	Steel	Steel	Steel	
Outer Plate Material	SAE1008	SAE1008 / Hollow Plate	SAE1008	
Inner Plate Material	SAE1008	SAE1008	SAE1008	
Tensile Strength	≥ 820kgf	≥ 920kgf	≥ 820kgf	
Finish	(D) Dacromet	(S) Silver Ni	(D) Dacromet	(B) Black
Connect End Pin	●	●	●	
Connect Guide Pin	×	×	×	
Connect Easy Link	×	×	×	

Model No.	CNX46 (S)	CNX56 (S)	CNX58(S)	CNX59(S)
Speed	Single / Fixed / BMX	Single / Fixed / BMX	Single / Fixed / BMX	Single / Fixed / BMX
Pitch	1/2" x 1/8"	1/2" x 1/8"	1/2" x 3/32"	1/2" x 3/32"
Pin Material	SCM420	Chromized SCM / Hollow Pin	SCM420	Chromized SCM / Hollow Pin
Pin Power	≥ 150kgf	≥ 150kgf	≥ 150kgf	≥ 150kgf
Roller	Steel	SCM435	SCM435	SCM435
Outer Plate Material	SAE1035	SAE1035	SAE1035	SAE1035
Inner Plate Material	SAE1035	SAE1035	SAE1035	SAE1035
Tensile Strength	≥ 1000kgf	≥ 1000kgf	≥ 1000kgf	≥ 1000kgf
Finish	(S) Silver Ni	(S) Silver Ni	(S) Silver Ni	(S) Silver Ni
Connect End Pin	○ (optional)	○ (optional)	○ (optional)	○ (optional)
Connect Guide Pin	CNPX1 (included)	CNPX1 (included)	CNPX3 (included)	CNPX3 (included)
Connect Easy Link	×	×	×	×

Guide Pins

Model No.	CNP11	CNP10	CNP09	CNPX1	CNPX3
Chain Compatibility	11-Speed	10-Speed	9-Speed	CNX 1/8"	CNX 3/32"
Pin Width	5.5mm	5.9mm	6.7mm	9.6mm	7.8mm

Easy Q Links

Model No.	CNQ10	CNQ09	CNQ87
Chain Compatibility	10-Speed	9-Speed	8 / 7-Speed
Pitch	1/2" x 11/128"	1/2" x 11/128"	1/2" x 3/32"

Easy U Links

Model No.	CNU11	CNU10	CNU09	CNU87
Chain Compatibility	11-Speed	10-Speed	9-Speed	8 / 7-Speed
Pitch	1/2" x 11/128"	1/2" x 11/128"	1/2" x 11/128"	1/2" x 3/32"

Specifications

Outer Casings (Shift)

Model No.	OCSXP	OCSSP	OCS2S
Type	Shift Outer Casing	Shift Outer Casing	Shift Outer Casing
Description	Index-XP	Index-SP	Index-2SP
Shifter Compatibility	Index - R10/R9/R8/R7/L3/LF	Index - R10/R9/R8/R7/L3/LF	Index - R7/R6/R5/L3/LF
For Cable Diameter	Ø 1.2mm / Ø 1.1mm	Ø 1.2mm / Ø 1.1mm	Ø 1.2 mm / Ø 1.1mm
Inner Plastic Lining	●	●	●
Inner Metal Structure	Straight Steel Wire x 17	Straight Steel Wire x 17	Curled Flat Steel Coil (Hi-Density)
Reinforcement Lining	Braided Nylon	×	×
Outer Lining	Composite	Composite	Composite
Outer Dimension	Ø 4.5mm	Ø 4mm	Ø 4mm
Ferrule Material	Aluminum	Plastic	Plastic
Ferrule Diameter	Ø 6mm	Ø 6mm	Ø 6mm
Ferrule Finish	Silver	Black	Black
Color	(S) Silver / (Options)	(B) Black / (Y) Gray / (Options)	(B) Black / (Y) Gray / (Options)
Pre-Cut Length	To Order	To Order	To Order
Roll Length	500m / 50m / 40m / 30m	500m / 50m / 40m / 30m	500m / 50m / 40m / 30m

Outer Casings (Brake)

Model No.	OCBXP	OCB2X	OCB2P
Type	Brake Outer Casing	Brake Outer Casing	Brake Outer Casing
Description	Braided SP	Braided 2P	2P
Brake Compatibility	All	All	All
For Cable Diameter	Ø 1.6mm / Ø 1.5mm	Ø 1.6mm / Ø 1.5mm	Ø 1.6mm / Ø 1.5mm
Inner Plastic Lining	●	●	●
Inner Metal Structure	Straight Steel Wire x 18	Curled Flat Steel Coil	Curled Flat Steel Coil (Low-Density)
Reinforcement Lining	Braided Nylon	Braided Nylon	×
Outer Lining	Composite	Composite	Composite
Outer Dimension	Ø 5mm	Ø 5mm	Ø 5mm
Ferrule Material	Alloy	Alloy	Brass
Ferrule Diameter	Ø 6mm	Ø 6mm	Ø 6mm
Ferrule Finish	Silver	Silver	Chrome
Color	(S) Silver / (Options)	(S) Silver / (Options)	(B) Black / (Y) Gray / (Options)
Pre-Cut Length	To Order	To Order	To Order
Roll Length	500m / 50m / 40m / 30m	500m / 50m / 40m / 30m	500m / 50m / 40m / 30m

Disc Pads - SHIMANO® Type Shimano® is a registered trademark and brand name owned by Shimano Inc.

Model No.	DPS30	DPS20	DPS15	DPS10
Compatible Systems	XTR M965, M966, M975, Saint M800 XT M765, M775 SLX M665, Hone M60 LX M585, T665 Deore M535, M595	XT M755, M755-DH	Deore M555, M555-M Nexave C-92	Deore M465, M475, M495, M515, M525, Nexave C501, C601

Springs are included with necessary models

Disc Pads - HAYES® Type Hayes® is a registered trademark and brand name owned by Hayes Bicycle Group, a division of HB Performance Systems, Inc.

Model No.	DPH35	DPH25
Compatible Systems	Stroker Trail	Mag, MX1, HFX 9

Disc Pads - MAGURA® Type Magura® is a registered trademark and brand name owned by Gustav Magenwirth GmbH & Co. KG

Model No.	DPML7	DPMJ1	DPMM1
Compatible Systems	Louise 2007, BAT, Carbon	Julie	Matra Matra SL

Springs are included with necessary models

Disc Pads - AVID® Type Avid® is a registered trademark and brand name owned by SRAM Corporation.

Model No.	DPA10
Compatible Systems	Juicy BB7

Springs are included with necessary models

Disc Pads - FORMULA® Type Formula® is a registered trademark and brand name owned by Formula S.R.L.

Model No.	DPF10
Compatible Systems	Oro

Springs are included with necessary models

Disc Pads - TEKRO® Type Tekro® is a registered trademark and brand name owned by Tekro Technology Corporation.

Model No.	DPT10
Compatible Systems	Io

Notes

SUNRACE



Notes

SUNRACE



Notes

SUNRACE



Notes

SUNRACE



The Original And Best est. 1902

Look for Sturmey-Archer 2013-2014 catalogue.



STURMEY-ARCHER



Sun Race Sturmey-Archer Inc.

No. 51, Hai-Shan-Jung St. Hai-Hu Village,
Lu-Ju City, Taoyuan County, 338 Taiwan
Tel:+886 (3) 354-3900
Fax:+886 (3) 354-2858
E-mail:info@sunrace.com

Sun Race Sturmey-Archer Europe

Keienbergweg 79,
1101GE Amsterdam, The Netherlands
Tel:+31 (20) 609-0221
Fax:+31 (20) 609-0211
E-mail:info@sunrace.nl

Sun Race Sturmey-Archer USA

1436 Second Street, #409
Napa, CA 94559 U.S.A
Tel:+1 (707) 259-6700
Fax:+1 (707) 259-6710
E-mail:info@sunraceusa.com

www.sunrace.com
www.sturmey-archer.com
www.sturmey-archerheritage.com

